TRONIX guided by light

# LED driver | eldoLED ecodrive 240/A | 20W | DALI

ARTICLE NUMBER: 215-267

View this product in our webshop

eldoLED




15.11.2026 - Disclaimer: information subject to change.

The ECOdrive LED drivers from eldoLED feature a programmable output (constant current) and dim smoothly down to 1%, with excellent flicker performance. Also easy to apply in combination with single color, dimmable LED fixtures on a DALI basis.

### Features

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including single color lighting on DALI
- Output current: 150 - 1050 mA
- Output voltage: 10 - 40 volts


### Technical specifications:

| | |
|---|---|
| Product Name | LED driver \| eldoLED ecodrive 240/A \| 20W \| DALI |
| Ean | 8714984941564 |
| Outer box qty | 50st |
| Housing | Plastic housing |
| Model | Static |
| Output voltage | 10 - 40V |
| Output current | 150 - 1050mA |
| Suitable for outdoor use | No |
| Suitable for DC-voltage (primary side) | Yes |
| Output power | 20 - 20W |
| Degree of protection (IP) | IP20 |
| Length | 160.8mm |
| Width | 41.5mm |
| Height | 30.5mm |
| Power consumption | 20W |

| | |
|---|---|
| Input voltage | 176 - 250V |
| Frequency input voltage | 50 - 60Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | -20 - 50??C |
| Driver lifetime | 50000h |
| DIN-rail mounting | No |
| Brand | eldoLED |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant current |
| Warranty | 5 years |

15.11.2026 - Disclaimer: information subject to change.



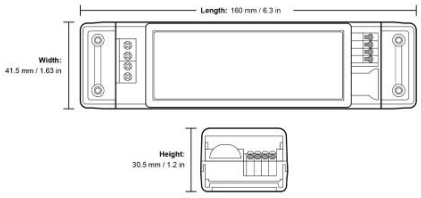


15.11.2026 - Disclaimer: information subject to change.