

LED driver | eldoLED ECOdrive 241/A | 20W | 0-10V

ARTICLE NUMBER: 215-601

View this
product in
our
webshop



eldoLED



24.08.2026 - Disclaimer: information subject to change.

The ECOdrive LED drivers from eldoLED feature a programmable output (constant current) and dim smoothly down to 1%, with excellent flicker performance. Also easy to apply in combination with single color, dimmable LED fixtures on a 0-10V basis.

Features

- Can be combined with a variety of LED lighting, including single color lighting on 0-10V
- Output current: 150 - 1050 mA
- Output voltage: 2 - 40 volts


Technical specifications:

Product Name	LED driver eldoLED ECOdrive 241/A 20W 0-10V
Ean	8714984943636
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	2 - 40V
Output current	150 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	20 - 20W
Degree of protection (IP)	IP20
Length	160mm
Width	41.5mm
Height	30.5mm
Power consumption	20W
Input voltage	176 - 250V
Frequency input voltage	50 - 60Hz

24.08.2026 - Disclaimer: information subject to change.

PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	0/1-10V
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

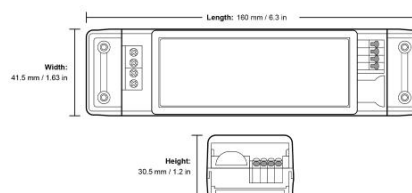

24.08.2026 - Disclaimer: information subject to change.