

# LED driver | eldoLED ECOdrive 560/A | 50W | DALI

ARTICLE NUMBER: 215-606

View this  
product in  
our  
webshop



eldoLED



24.08.2026 - Disclaimer: information subject to change.

The ECOdrive LED drivers from eldoLED feature a programmable output (constant current) and dim smoothly down to 1%, with excellent flicker performance. Also easy to apply in combination with single color, dimmable LED fixtures on a DALI basis.

## Features

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including single color lighting on DALI
- Output current: 150 - 1400 mA
- Output voltage: 2 - 55 volts

## Technical specifications:


|                                        |                                                  |
|----------------------------------------|--------------------------------------------------|
| Product Name                           | LED driver   eldoLED ECOdrive 560/A   50W   DALI |
| Ean                                    | 8714984943667                                    |
| Outer box qty                          | 40st                                             |
| Housing                                | Plastic housing                                  |
| Model                                  | Static                                           |
| Output voltage                         | 2 - 55V                                          |
| Output current                         | 150 - 1400mA                                     |
| Suitable for outdoor use               | No                                               |
| Suitable for DC-voltage (primary side) | Yes                                              |
| Output power                           | 50 - 50W                                         |
| Degree of protection (IP)              | IP20                                             |
| Length                                 | 153mm                                            |
| Width                                  | 76.2mm                                           |
| Height                                 | 30.5mm                                           |
| Power consumption                      | 50W                                              |

24.08.2026 - Disclaimer: information subject to change.



|                               |                  |
|-------------------------------|------------------|
| Input voltage                 | 120 - 250V       |
| Frequency input voltage       | 50 - 60Hz        |
| PWM modulation                | No               |
| Overload protection           | Yes              |
| Overtemperature protection    | Yes              |
| Control method                | DALI             |
| Short-circuit protected       | Yes              |
| Ambient temperature           | -20 - 50??C      |
| Driver lifetime               | 50000h           |
| DIN-rail mounting             | No               |
| Brand                         | eldoLED          |
| Dimmable                      | Yes              |
| Emergency power supply system | None             |
| Control type                  | Constant current |
| Warranty                      | 5 years          |

24.08.2026 - Disclaimer: information subject to change.

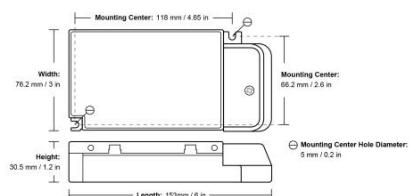

24.08.2026 - Disclaimer: information subject to change.