TRONIX guided by light

LED driver | eldoLED SOLOdrive 241/A | 20W | 0-10V

ARTICLE NUMBER: 215-621

View this product in our webshop

eldoLED



11.11.2026 - Disclaimer: information subject to change.

The SOLOdrive LED drivers from eldoLED feature a programmable output (constant current) and offer the ability to dim down to 0.1%. Also easy to apply in combination with single color, dimmable LED fixtures on a 0-10V basis.

Features


- Can be combined with a variety of LED lighting, including single color lighting on 0-10V
- Output current: 150 - 1050 mA
- Output voltage: 2 - 40 volts

Technical specifications:

Product Name	LED driver | eldoLED SOLOdrive 241/A | 20W | 0-10V
Ean	8714984943681
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	2 - 40V
Output current	150 - 1050mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	20 - 20W
Degree of protection (IP)	IP20
Length	160mm
Width	41.5mm
Height	30.5mm
Power consumption	20W
Input voltage	176 - 250V
Frequency input voltage	50 - 60Hz

Overload protection	Yes
Overtemperature protection	Yes
Control method	0/1-10V
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

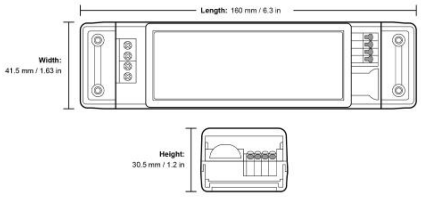


Length: 160 mm / 6.3 in
Width:
41.5 mm / 1.63 in
Height:
30.5 mm / 1.2 in