# LED driver | eldoLED SOLOdrive 360/A | 30W | DALI

ARTICLE NUMBER: 215-625

View this product in our webshop

eldoLED




11.11.2026 - Disclaimer: information subject to change.

The ECOdrive LED drivers from eldoLED feature a programmable output (constant current) and offer the ability to dim down to 0.1%. Also easy to apply in combination with single color, dimmable LED fixtures on a DALI basis.

### Features


- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including single color lighting on DALI
- Output current: 150 - 1400 mA
- Output voltage: 2 - 55 volts

### Technical specifications:

| | |
|---|---|
| Product Name | LED driver \| eldoLED SOLOdrive 360/A \| 30W \| DALI |
| Ean | 8714984943698 |
| Outer box qty | 50st |
| Housing | Plastic housing |
| Model | Static |
| Output voltage | 2 - 55V |
| Output current | 150 - 1400mA |
| Suitable for outdoor use | No |
| Suitable for DC-voltage (primary side) | Yes |
| Output power | 30 - 30W |
| Degree of protection (IP) | IP20 |
| Length | 210mm |
| Width | 40mm |
| Height | 33.5mm |
| Power consumption | 30W |

| | |
|---|---|
| Input voltage | 120 - 250V |
| Frequency input voltage | 50 - 60Hz |
| Overload protection | Yes |
| Overtemperature protection | Yes |
| Control method | DALI |
| Short-circuit protected | Yes |
| Ambient temperature | -20 - 50??C |
| Driver lifetime | 50000h |
| DIN-rail mounting | No |
| Brand | eldoLED |
| Dimmable | Yes |
| Emergency power supply system | None |
| Control type | Constant current |
| Warranty | 5 years |



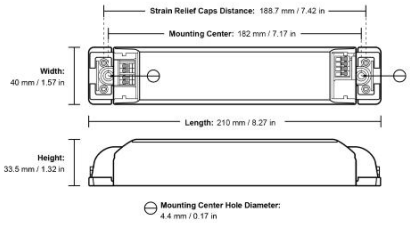


11.11.2026 - Disclaimer: information subject to change.