

LED driver | eldoLED SOLOdrive 560/A | 50W | DALI

ARTICLE NUMBER: 215-271

View this
product in
our
webshop



eldoLED



17.08.2026 - Disclaimer: information subject to change.

The SOLOdrive LED drivers from eldoLED feature a programmable output (constant current) and offer the ability to dim down to 0.1%. Also easy to apply in combination with single color, dimmable LED fixtures on a DALI basis.

Features

- Can be combined with the 214-231 Casambi module (via the LED code input)
- Can be combined with a variety of LED lighting, including single color lighting on DALI
- Output current: 150 - 1400 mA
- Output voltage: 2 - 55 volts

Technical specifications:


Product Name	LED driver eldoLED SOLOdrive 560/A 50W DALI
Ean	8714984942295
Outer box qty	40st
Housing	Plastic housing
Model	Static
Output voltage	2 - 55V
Output current	150 - 1400mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	40 - 40W
Degree of protection (IP)	IP20
Length	152.5mm
Width	76.2mm
Height	30.1mm
Power consumption	40W

17.08.2026 - Disclaimer: information subject to change.



Input voltage	120 - 250V
Frequency input voltage	- - -Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

17.08.2026 - Disclaimer: information subject to change.

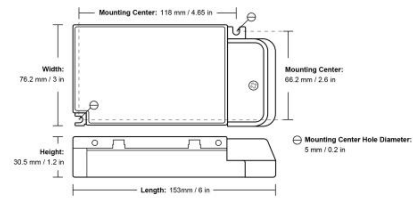

17.08.2026 - Disclaimer: information subject to change.

