

Led Exit Sign | 3 Phase Track | White | AT | Incl Pictograms

ARTICLE NUMBER: 600-060

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



Compact and versatile emergency lighting fixture for 3-phase track systems. Features a 25 m viewing distance, automatic self-test, and interchangeable pictograms – for quick installation and reliable escape route indication.

Key product features

- **Mounting method:** Track adapter
- **Max. system power (W):** 1
- **Housing colour:** White
- **Type of indicator:** Single-sided/double-sided
- **Recognition distance (m):** 25
- **Function:** Escape route indication
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	Led Exit Sign 3 Phase Track White AT Incl Pictograms
Ean	8714984950672
Outer box qty	6st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	150 - 150mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Busbar adaptor
Degree of protection (IP)	IP20
Nominal voltage	220 - 240V

24.08.2026 - Disclaimer: information subject to change.



Length	340mm
Width	62mm
Height	105mm
Height/depth	105mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting/signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK00
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	80lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2-1	80 - 80lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test

24.08.2026 - Disclaimer: information subject to change.



Luminous flux in emergency mode	80lm
Recognition distance	25m
Power consumption in emergency mode	1W
Type of indicator	Single/double-sided
Connectable conductor cross section	0.75 - 2.5mm??
Suitable for labelling type	Insert sheet/plate
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45??C

24.08.2026 - Disclaimer: information subject to change.

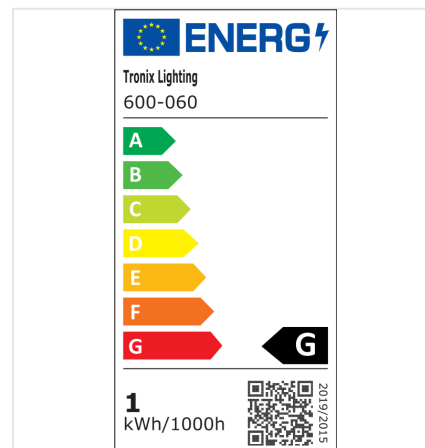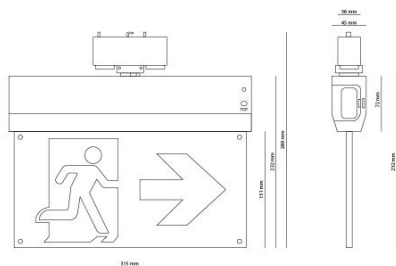

24.08.2026 - Disclaimer: information subject to change.