

LED exit sign IP65 | surface mount | AT | incl. pictograms

ARTICLE NUMBER: 600-043

View this
product in
our
webshop



04.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



Impact-resistant and waterproof LED emergency light with automatic self-test, 240-lumen output, and a 30-metre viewing distance. Designed for ceiling mounting in indoor and outdoor areas. Supplied with 9 interchangeable pictograms.

Key product features

- **Mounting method:** Ceiling surface mounting
- **Max. system power (W):** 5
- **Degree of protection (IP):** IP65
- **Recognition distance (m):** 30
- **Function:** Escape route indication
- **Impact strength:** IK10
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	LED exit sign IP65 surface mount AT incl. pictograms
Ean	8714984946972
Outer box qty	6st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, opal
Voltage type	AC
Nominal current	80 - 80mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Ceiling surface mounting
Degree of protection (IP)	IP65
Nominal voltage	220 - 240V

04.08.2026 - Disclaimer: information subject to change.



Length	194mm
Width	340mm
Height	108mm
Height/depth	108mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK10
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	240lm
Nominal operation time	3 - 3h
Max. system power	5W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2-1	240 - 240lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test

04.08.2026 - Disclaimer: information subject to change.



Recognition distance	30m
Power consumption in emergency mode	2W
Type of indicator	Single/double-sided
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for labelling type	Insert sheet/plate
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C

04.08.2026 - Disclaimer: information subject to change.

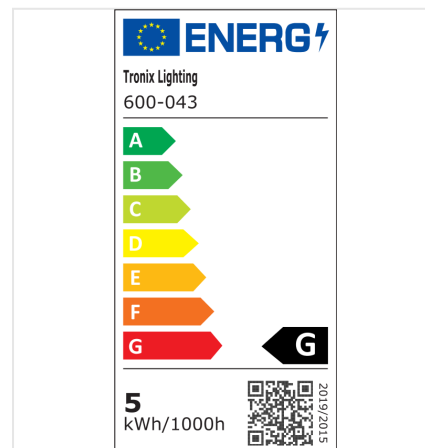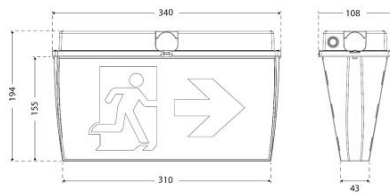

04.08.2026 - Disclaimer: information subject to change.