LED exit sign | surface mount | small | black | incl. pict.

ARTICLE NUMBER: 600-045

View this product in our webshop



13.11.2026 - Disclaimer: information subject to change.

Compact and versatile LED emergency luminaire with a 20 m visibility range, automatic self-test, and interchangeable pictograms. Suitable for wall and ceiling mounting in professional environments.

Key product features

- **Mounting method:** Surface-mounted (wall/ceiling)
- **Max. system power (W):** 3
- **Housing colour:** Black
- **Type of indicator:** Single-sided/double-sided
- **Recognition distance (m):** 20
- **Function:** Escape route indication
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	LED exit sign | surface mount | small | black | incl. pict.
Ean	8714984949492
Outer box qty	20st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	150 - 150mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounting/ceiling surface mounting
Degree of protection (IP)	IP20
Nominal voltage	220 - 240V
Length	235mm


13.11.2026 - Disclaimer: information subject to change.


Width	38mm
Height	163mm
Height/depth	163mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting/signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK00
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 ??C	50000h
Luminous flux in standby mode	26lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	26 - 26lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	26lm


13.11.2026 - Disclaimer: information subject to change.

Recognition distance	20m
Power consumption in emergency mode	0.5W
Type of indicator	Single/double-sided
Connectable conductor cross section	0.75 - 2.5mm??
Suitable for labelling type	Insert sheet/plate
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45??C



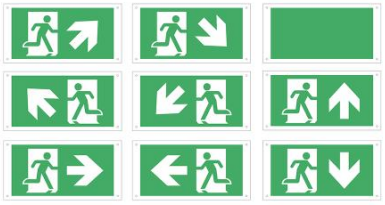

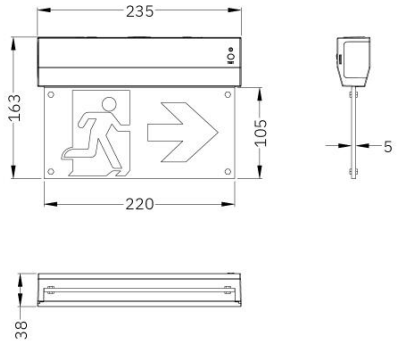

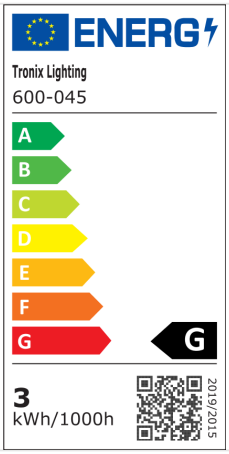

13.11.2026 - Disclaimer: information subject to change.