

LED exit sign | surface mount | small | black |  
incl. pict.

ARTICLE NUMBER: 600-045

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.



Compact and versatile LED emergency luminaire with a 20 m visibility range, automatic self-test, and interchangeable pictograms. Suitable for wall and ceiling mounting in professional environments.

## Key product features

- **Mounting method:** Surface-mounted (wall/ceiling)
- **Max. system power (W):** 3
- **Housing colour:** Black
- **Type of indicator:** Single-sided/double-sided
- **Recognition distance (m):** 20
- **Function:** Escape route indication
- **Emergency function monitoring system:** Automatic self-diagnosis

## Technical specifications:

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| Product Name              | LED exit sign   surface mount   small   black   incl. pict. |
| Ean                       | 8714984949492                                               |
| Outer box qty             | 20st                                                        |
| Housing material          | Plastic                                                     |
| Lamp type                 | LED not exchangeable                                        |
| Housing colour            | Black                                                       |
| Material cover            | Plastic, transparent                                        |
| Voltage type              | AC                                                          |
| Nominal current           | 150 - 150mA                                                 |
| Type of control gear      | LED operating device current-controlled                     |
| Battery technology        | Lithium-ion                                                 |
| Mounting method           | Wall surface mounting/ceiling surface mounting              |
| Degree of protection (IP) | IP20                                                        |
| Nominal voltage           | 220 - 240V                                                  |
| Length                    | 235mm                                                       |

24.08.2026 - Disclaimer: information subject to change.



|                                                 |                                  |
|-------------------------------------------------|----------------------------------|
| Width                                           | 38mm                             |
| Height                                          | 163mm                            |
| Height/depth                                    | 163mm                            |
| Colour temperature                              | 5000 - 5000K                     |
| Exchangeable control gear                       | No                               |
| Function                                        | Escape route lighting/signage    |
| With pictogram                                  | Yes                              |
| Suitable for standby switching                  | Yes                              |
| Suitable for continuous circuit                 | Yes                              |
| Impact strength                                 | IK00                             |
| RAL-number housing                              | 9005                             |
| Connection type                                 | Plug-in connection               |
| Light distributor                               | Diffuser lens/optic/panel        |
| Rated lifetime L70/B50 at 25 °C                 | 50000h                           |
| Luminous flux in standby mode                   | 26lm                             |
| Nominal operation time                          | 3 - 3h                           |
| Max. system power                               | 3W                               |
| Power factor                                    | 0.3                              |
| Type of wiring                                  | Ending                           |
| Number of poles                                 | 2                                |
| With heating element for battery                | No                               |
| Type of lithium-ion battery                     | Lithium iron phosphate (LiFePO4) |
| Rated luminous flux according to IEC 62722-2- 1 | 26 - 26lm                        |
| Emergency power supply system                   | Peripheral (individual battery)  |
| Emergency function monitoring system            | Automatic self test              |
| Luminous flux in emergency mode                 | 26lm                             |

24.08.2026 - Disclaimer: information subject to change.



|                                     |                           |
|-------------------------------------|---------------------------|
| Recognition distance                | 20m                       |
| Power consumption in emergency mode | 0.5W                      |
| Type of indicator                   | Single/double-sided       |
| Connectable conductor cross section | 0.75 - 2.5mm <sup>2</sup> |
| Suitable for labelling type         | Insert sheet/plate        |
| Warranty                            | 5 years (battery 2 years) |
| Ambient temperature                 | 1 - 45°C                  |

24.08.2026 - Disclaimer: information subject to change.

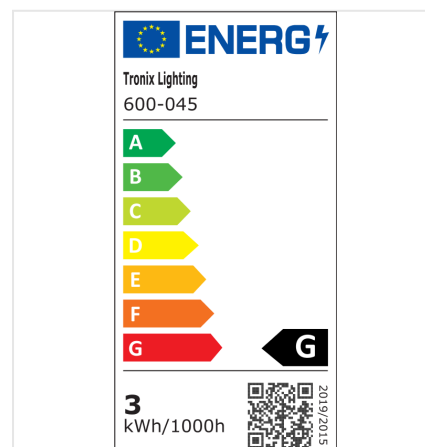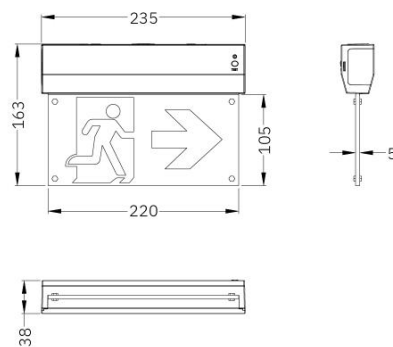

24.08.2026 - Disclaimer: information subject to change.