

LED exit sign | surface mount | small | white |
incl. pict.

ARTICLE NUMBER: 600-044

View this
product in
our
webshop



26.08.2026 - Disclaimer: information subject to change.

Compact and versatile LED emergency luminaire with a 20 m visibility range, automatic self-test, and interchangeable pictograms. Suitable for wall and ceiling mounting in professional environments.

Key product features

- **Mounting method:** Surface-mounted (wall/ceiling)
- **Max. system power (W):** 3
- **Housing colour:** White
- **Type of indicator:** Single-sided/double-sided
- **Recognition distance (m):** 20
- **Function:** Escape route indication
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	LED exit sign surface mount small white incl. pict.
Ean	8714984949485
Outer box qty	20st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	150 - 150mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Wall surface mounting/ceiling surface mounting
Degree of protection (IP)	IP20
Nominal voltage	220 - 240V
Length	235mm

26.08.2026 - Disclaimer: information subject to change.



Width	38mm
Height	163mm
Height/depth	163mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK00
RAL-number housing	9016
Connection type	Plug-in connection
Light distributor	Diffuser lens/optic/panel
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	26lm
Nominal operation time	3 - 3h
Max. system power	3W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2- 1	26 - 26lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	26lm

26.08.2026 - Disclaimer: information subject to change.



Recognition distance	20m
Power consumption in emergency mode	0.5W
Type of indicator	Single/double-sided
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for labelling type	Insert sheet/plate
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C

26.08.2026 - Disclaimer: information subject to change.

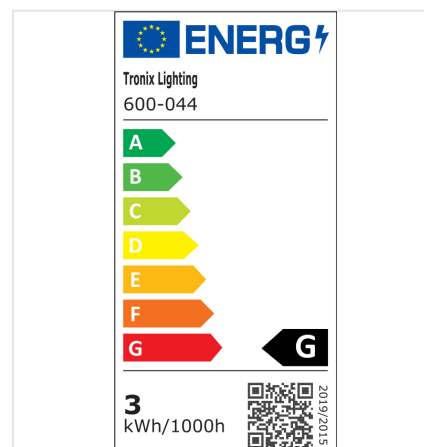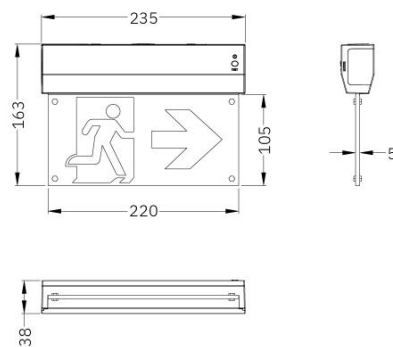

26.08.2026 - Disclaimer: information subject to change.