

LED exit sign | wall mount | black | AT | incl. pictograms

ARTICLE NUMBER: 600-020

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Compact LED emergency luminaire with automatic self-test, orientation lighting and interchangeable pictograms. Suitable for wall mounting or semi-recessed installation. Ideal for permanent escape route indication in professional environments.

Key product features

- **Mounting method:** Surface/recessed
- **Max. system power (W):** 5
- **Housing colour:** Black
- **Type of indicator:** Single-sided
- **Recognition distance (m):** 25
- **Function:** Escape route lighting/indication
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	LED exit sign wall mount black AT incl. pictograms
Ean	8714984942332
Outer box qty	10st
Housing material	Plastic
Lamp type	LED not exchangeable
Housing colour	Black
Material cover	Plastic, transparent
Voltage type	AC
Nominal current	50 - 50mA
Type of control gear	LED operating device current-controlled
Battery technology	Lithium-ion
Mounting method	Surface mounting/recessed mounting
Degree of protection (IP)	IP40
Nominal voltage	220 - 240V

24.08.2026 - Disclaimer: information subject to change.




Length	330mm
Width	190mm
Height	45mm
Height/depth	45mm
Colour temperature	5000 - 5000K
Exchangeable control gear	No
Function	Escape route lighting/signage
With pictogram	Yes
Suitable for standby switching	Yes
Suitable for continuous circuit	Yes
Impact strength	IK07
RAL-number housing	9005
Connection type	Plug-in connection
Light distributor	None
Rated lifetime L70/B50 at 25 °C	50000h
Luminous flux in standby mode	35lm
Nominal operation time	3 - 3h
Max. system power	1W
Power factor	0.3
Type of wiring	Ending
Number of poles	2
With heating element for battery	No
Type of lithium-ion battery	Lithium iron phosphate (LiFePO4)
Rated luminous flux according to IEC 62722-2-1	35 - 35lm
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test

24.08.2026 - Disclaimer: information subject to change.



Luminous flux in emergency mode	50lm
Recognition distance	25m
Power consumption in emergency mode	1.5W
Type of indicator	Single-sided
Connectable conductor cross section	0.75 - 2.5mm ²
Suitable for labelling type	Insert sheet/plate
Warranty	5 years (battery 2 years)
Ambient temperature	1 - 45°C

24.08.2026 - Disclaimer: information subject to change.

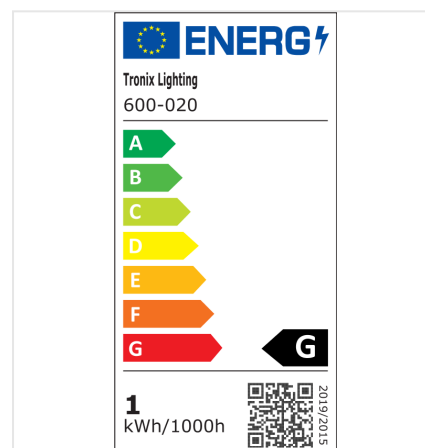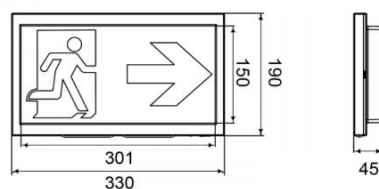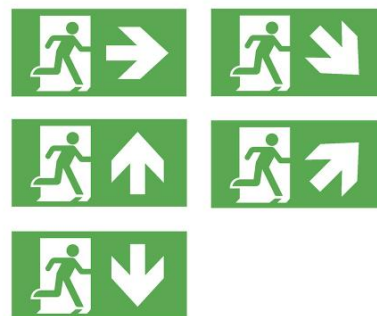

24.08.2026 - Disclaimer: information subject to change.