

LED mini neon flex | 24V | 15m | 5700K | white

ARTICLE NUMBER: 075-064

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Provide a facade with a bright neon line using this set of LED mini neon flex flat. This neon light line provides a subtle, compact and above all safe finish in combination with a modern look. One unit consists of six LEDs (10 cm), comes with a power cord and are easily extendable with various connection accessories. For straight cuts with our LED neon flex lights, a special shearing tool is required (see related products).

Professional LED neon flex lighting: The best alternative to conventional neon lighting

LED neon flex is characterized as a high-quality, flexible rope light with the apparent looks of traditional neon lighting. With a blend of low power consumption, long lifespan and exceptional flexibility, LED neon flex is the perfect alternative to fluorescent neon lighting.

Features

- SMD5050 LED & PCB housing
- Availability in 6 Colors & RGB
- Easy screw connection system for maximum moisture resistance IP67
- Transverse minimum bending diameter: 12cm
- Flame-, saltwater-, solvents- and UV resistant
- Other dimensions on request. Power cable (max 10 meters) is molded for optimum water resistance (IP67)

Technical specifications:

Product Name	LED mini neon flex 24V 15m 5700K white
Ean	8714984919662
Outer box qty	1st
Model	Hose
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	72

24.08.2026 - Disclaimer: information subject to change.


Lamp power per meter	5W
Beam angle	160°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	83.3mm
Degree of protection (IP)	IP67
Self-adhesive	No
Luminous flux per meter	120lm
Total length	15m
Width	9mm
Height/depth	18mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	25000h
Colour of light adjustable	No
Luminous flux per foot	36.58lm
Luminous flux adjustable	Continuously variable
Max. system power	75W
Beam angle adjustable	No
Luminaire efficacy	24lm/W
Type of wiring	Ending
Number of poles	2

24.08.2026 - Disclaimer: information subject to change.



Type of power supply	Mains power supply
Connectable conductor cross section	0.75 - 0.75mm ²
Colour temperature	5700K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	90mm

24.08.2026 - Disclaimer: information subject to change.

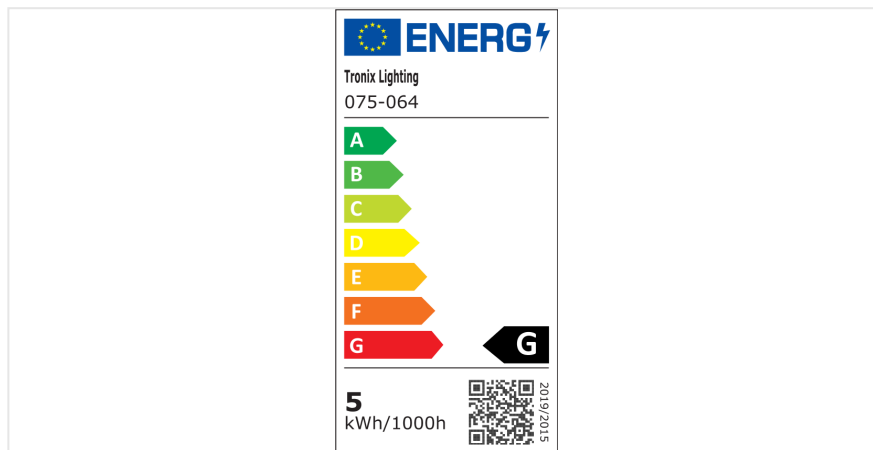

24.08.2026 - Disclaimer: information subject to change.