

LED neon flex pro || 24V | 10m | 60 LED/m | white

ARTICLE NUMBER: 110-041

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



Provide a facade with a bright and colorful neon line using this set of LED neon flex pro. Choose from a variety of colors, each featuring a sturdy frame and round light side for a classic or retro effect. One unit consists of six LEDs (10 cm), comes with a power cord and are easily extendable with various connection accessories. For straight cuts with our LED neon flex lights, a special shearing tool is required (see related products).

Professional LED neon flex lighting: The best alternative to conventional neon lighting

LED neon flex is characterized as a high-quality, flexible rope light with the apparent looks of traditional neon lighting. With a blend of low power consumption, long lifespan and exceptional flexibility, LED neon flex is the perfect alternative to fluorescent neon lighting.

Features

- SMD5050 LED & PCB housing
- Availability in 6 Colors & RGB
- Easy screw connection system for maximum moisture resistance IP67
- Transverse minimum bending diameter: 12cm
- Flame-, saltwater-, solvents- and UV resistant
- Other dimensions on request. Power cable (max 10 meters) is molded for optimum water resistance (IP67)

Technical specifications:

Product Name	LED neon flex pro 24V 10m 60 LED/m white
Ean	8714984911673
Model	Hose
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	60
Lamp power per meter	12W

25.08.2026 - Disclaimer: information subject to change.


Beam angle	160°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	100mm
Degree of protection (IP)	IP67
Self-adhesive	No
Luminous flux per meter	380lm
Total length	10m
Width	11.5mm
Height/depth	29mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	25000h
Colour of light adjustable	No
Luminous flux per foot	115.82lm
Luminous flux adjustable	Continuously variable
Max. system power	240W
Beam angle adjustable	No
Luminaire efficacy	31.7lm/W
Type of wiring	Ending
Number of poles	2
Type of power supply	Mains power supply

25.08.2026 - Disclaimer: information subject to change.



Connectable conductor cross section	0.75 - 0.75mm²
Colour temperature	5700K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	120mm

25.08.2026 - Disclaimer: information subject to change.

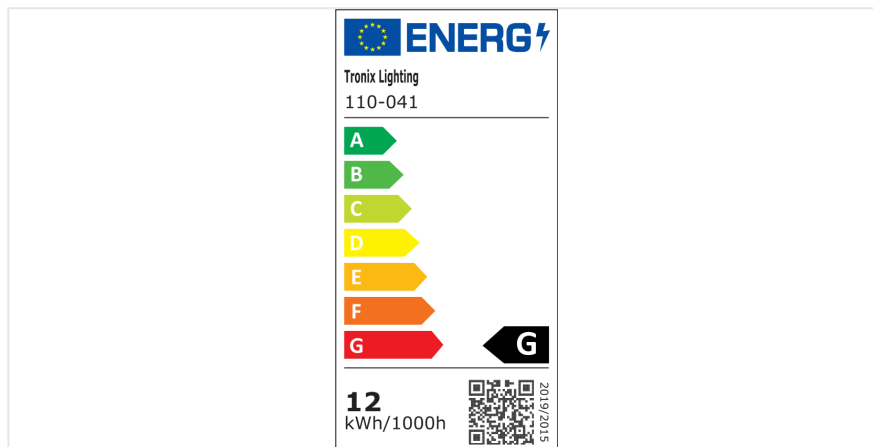

25.08.2026 - Disclaimer: information subject to change.