

LED neon flex up/down | 24V | 10m | 60
LED/m | warm white

ARTICLE NUMBER: 077-058

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Provide a facade with a bright neon line using this set of LED neon flex up & down. This light line provides a unique lighting effect combined with a modern look, made possible in part by the illuminating sides of this line. One unit consists of six LEDs (10 cm), comes with a power cord and are easily extendable with various connection accessories. For straight cuts with our LED neon flex lights, a special shearing tool is required (see related products).

Professional LED neon flex lighting: The best alternative to conventional neon lighting

LED neon flex is characterized as a high-quality, flexible rope light with the apparent looks of traditional neon lighting. With a blend of low power consumption, long lifespan and exceptional flexibility, LED neon flex is the perfect alternative to fluorescent neon lighting.

Features

- SMD5050 LED & PCB housing
- Availability in 6 Colors & RGB
- Easy screw connection system for maximum moisture resistance IP67
- Transverse minimum bending diameter: 12cm
- Flame-, saltwater-, solvents- and UV resistant
- Other dimensions on request. Power cable (max 10 meters) is molded for optimum water resistance (IP67)

Technical specifications:

Product Name	LED neon flex up/down 24V 10m 60 LED/m warm white
Ean	8714984919747
Outer box qty	1st
Model	Hose
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V

24.08.2026 - Disclaimer: information subject to change.

Number of nodes per meter	108
Lamp power per meter	10.5W
Beam angle	160°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	100mm
Degree of protection (IP)	IP67
Self-adhesive	No
Luminous flux per meter	450lm
Total length	10m
Width	16mm
Height/depth	16mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	25000h
Colour of light adjustable	No
Luminous flux per foot	137.16lm
Luminous flux adjustable	Continuously variable
Max. system power	105W
Beam angle adjustable	No
Luminaire efficacy	42.9lm/W
Type of wiring	Ending

24.08.2026 - Disclaimer: information subject to change.



Number of poles 2

Type of power supply Mains power supply

Connectable conductor cross section 0.75 - 0.75mm²


Colour temperature 3000K

Warranty 3 years

Ambient temperature -20 - 50°C

Lowest bending radius 120mm

24.08.2026 - Disclaimer: information subject to change.

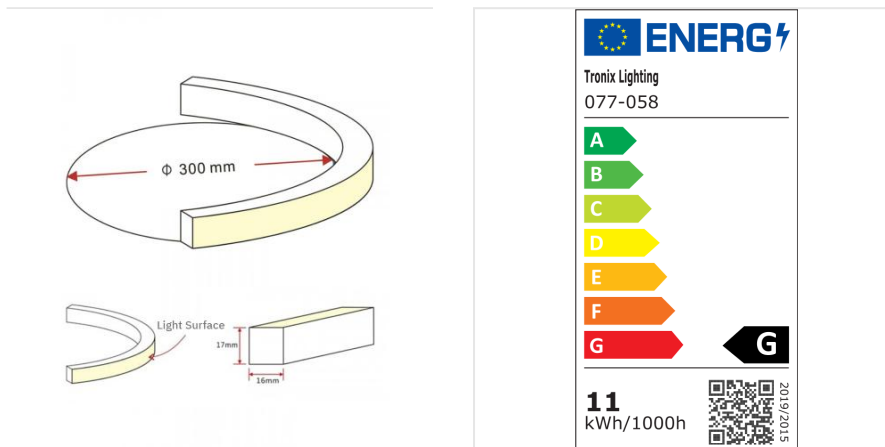

24.08.2026 - Disclaimer: information subject to change.