

LED panel | 30*120 | 25W | 3-CCT | 2m cable EU plug

ARTICLE NUMBER: 173-026

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

This LED panel is suitable for installation in (suspended) ceilings of 60*60 cm. A hanging up method is also possible, using suspension cables or a surface mounting kit. The smooth, soft and flicker-free light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

Features

- High quality external driver with optimal heat dissipation
- Flicker-free (1%)
- Plug & Play by means of power cord and Euro plug
- CRI >80
- High light efficiency of >150 Lm / W
- 5 years warranty
- Adjustable by means of a CCT switch in the color temperatures 3000K, 4000K and 5700K

Technical specifications:

Product Name	LED panel 30*120 25W 3-CCT 2m cable EU plug
Ean	8714984946828
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	107 - 107mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	1195mm

24.08.2026 - Disclaimer: information subject to change.

Built-in width	295mm
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	1195mm
Width	295mm
Height/depth	25mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered

24.08.2026 - Disclaimer: information subject to change.

Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	25W
Beam angle adjustable	No
Power factor	0.91
Type of wiring	Ending
Number of poles	2
Built-in height/depth	25mm
Compatible with Casambi	No
Luminaire efficacy	150 - 150lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3750 - 3750lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	21.5
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	30x120 cm

24.08.2026 - Disclaimer: information subject to change.



Colour temperature	3000 - 4000 - 5700K
--------------------	---------------------

With connection cord and plug	Yes
-------------------------------	-----

Length of power cord	2000mm
----------------------	--------

Connection type	EU plug
-----------------	---------




Dimming method	Non-dimmable
----------------	--------------

Warranty	5 years
----------	---------

Ambient temperature	-20 - 40??C
---------------------	-------------

Connection cable length	2000m
-------------------------	-------

24.08.2026 - Disclaimer: information subject to change.

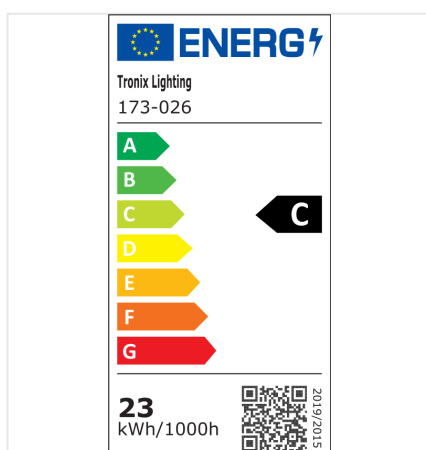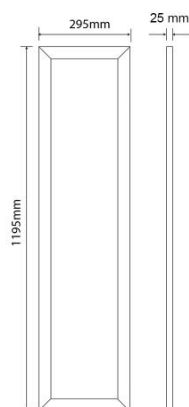

24.08.2026 - Disclaimer: information subject to change.