

LED panel | 30*120 | 25W | 3-CCT | UGR<19 |
excl. driver

ARTICLE NUMBER: 173-021

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



These driverless LED panels combine high efficiency with versatile control options. They are optionally available with a range of dimmable drivers, including phase-cut dimming and DALI, for maximum control and performance.

Key product features:

- **With control gear:** No
- **Colour temperature (K):** 3000 – 5700
- **Built-in height/depth (mm):** 25
- **Unified Glare Ratio (UGR):** 19
- **Dimmable:** Yes
- **Luminaire efficacy (lm/W):** 139 - 151

This panel is delivered excl. driver, so it can be made dimmable. To make it dimmable, you need the following:

Single color:

- Connector set 173-096;
- Triac, Dali, 1-10V or RF dimmable driver (find related products, set to 650mA);
- Europlug or GST-plug.

Tuneable white:

- Connector set 173-095;
- Dali or RF dimmable driver that is suitable for tuneable white (find related products, set to 650mA);
- Europlug or GST-plug.

24.08.2026 - Disclaimer: information subject to change.

Technical specifications:

Product Name	LED panel 30*120 25W 3-CCT UGR19 excl. driver
Ean	8714984946637
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, structured
Suitable for emergency lighting	Yes
Nominal current	0 - 650mA
Voltage type	DC
Type of control gear	LED operating device current-controlled
With control gear	No
Built-in length	1195mm
Built-in width	295mm
Constant light output (CLO)	Yes
Type of grid	None
Nominal voltage	38 - 38V
Length	1195mm
Width	295mm
Height/depth	25mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	Yes
Dimming 1-10 V	Yes
Dimming DALI	Yes




24.08.2026 - Disclaimer: information subject to change.

Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	Yes
Dimming Zigbee	Yes
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	Continuously variable
Luminous flux adjustable	Continuously variable
Max. system power	25W
Beam angle adjustable	No
Power factor	1
Type of wiring	Ending
Number of poles	4
Built-in height/depth	25mm
Compatible with Casambi	Yes
Luminaire efficacy	150 - 150lm/W
Dimmable	Yes

24.08.2026 - Disclaimer: information subject to change.

Rated luminous flux according to IEC 62722-2- 1	0 - 3750lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	18.3
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	30x120 cm
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	No
Dimming method	Optional
Warranty	5 years
Ambient temperature	-20 - 40°C

24.08.2026 - Disclaimer: information subject to change.

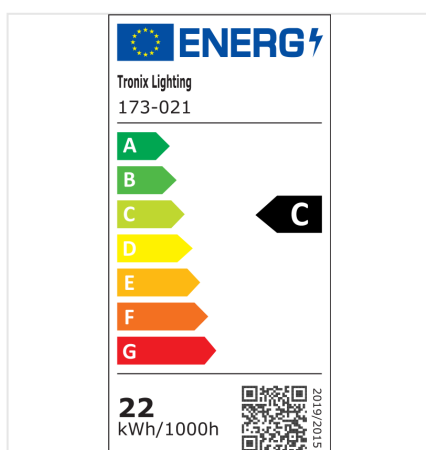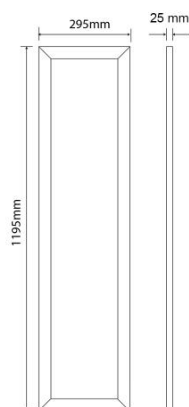

24.08.2026 - Disclaimer: information subject to change.