



LED panel | 30*120 | 36W | 3-CCT | 2m cable EU plug

ARTICLE NUMBER: 173-051

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Practical LED panel with 120 lm/W output, adjustable colour temperature and EU plug. Available with standard or UGR<19 optics. Ideal for a wide range of applications.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Built-in height/depth (mm):** 25
- **Unified Glare Ratio (UGR):** 22
- **Connection type:** Plug
- **Luminaire efficacy (lm/W):** 115 - 126

Technical specifications:

Product Name	LED panel 30*120 36W 3-CCT 2m cable EU plug
Ean	8714984946743
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	152 - 152mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	1195mm
Built-in width	295mm
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V

24.08.2026 - Disclaimer: information subject to change.

Length	1195mm
Width	295mm
Height/depth	25mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	60000h
Colour of light adjustable	Positions
Luminous flux adjustable	No

24.08.2026 - Disclaimer: information subject to change.

Max. system power	36W
Beam angle adjustable	No
Power factor	0.98
Type of wiring	Ending
Number of poles	2
Built-in height/depth	25mm
Compatible with Casambi	No
Luminaire efficacy	110 - 110lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3960 - 3960lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	21.8
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	30x120 cm
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	Yes
Length of power cord	2000mm

24.08.2026 - Disclaimer: information subject to change.



Connection type	EU plug
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	2000m

24.08.2026 - Disclaimer: information subject to change.






CARE



SHARE



CONNECT

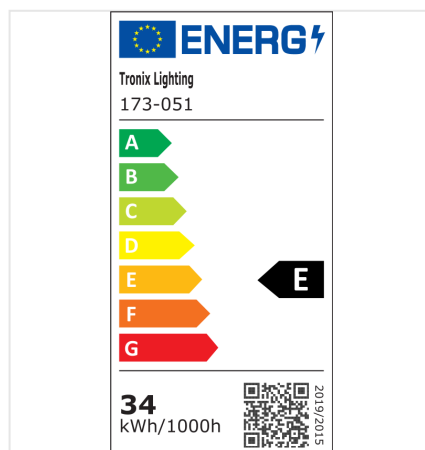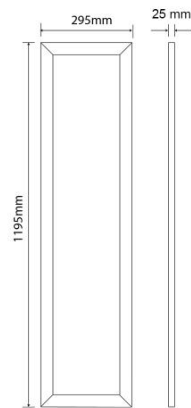

24.08.2026 - Disclaimer: information subject to change.