

LED panel | 30*60 | 6/8/10/13/15W | 3-
CCT | EU plug

ARTICLE NUMBER: 173-032

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.





Efficient 30x60 cm LED panel with selectable colour temperature and light output. Supplied with EU plug and non-dimmable driver. Ideal for grid ceilings in commercial applications.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** White
- **Connection type:** Plug
- **Unified Glare Ratio (UGR):** 22
- **Luminous flux adjustable:** Steps
- **Luminaire efficacy (lm/W):** 140

Technical specifications:

Product Name	LED panel 30*60 6/8/10/13/15W 3-CCT EU plug
Ean	8714984949409
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	64 - 64mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	295mm
Built-in diameter	35mm

24.08.2026 - Disclaimer: information subject to change.

Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	595mm
Width	295mm
Height/depth	35mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80?? - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6

24.08.2026 - Disclaimer: information subject to change.

Rated lifetime L70/B50 at 25 °C	83000h
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	15W
Beam angle adjustable	No
Power factor	0.96
Type of wiring	Ending
Number of poles	2
Built-in height/depth	35mm
Compatible with Casambi	No
Luminaire efficacy	140 - 140lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	840 - 2100lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 2.5mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	21.5
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	30x60 cm

24.08.2026 - Disclaimer: information subject to change.



Colour temperature	3000 - 4000 - 5700K
--------------------	---------------------

With connection cord and plug	Yes
-------------------------------	-----

Length of power cord	2000mm
----------------------	--------

Connection type	EU plug
-----------------	---------




Dimming method	Non-dimmable
----------------	--------------

Warranty	5 years
----------	---------

Ambient temperature	-20 - 40??C
---------------------	-------------

Connection cable length	2000m
-------------------------	-------

24.08.2026 - Disclaimer: information subject to change.

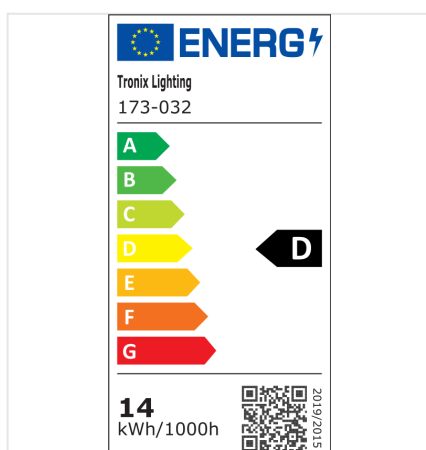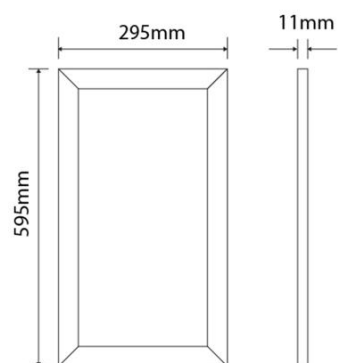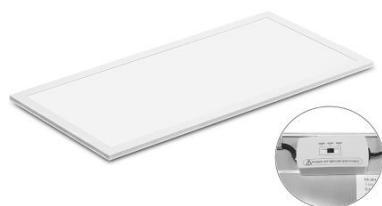

24.08.2026 - Disclaimer: information subject to change.