

LED panel|| 60*120 | >100L/W | 3-CCT | white
frame | non dim

ARTICLE NUMBER: 174-237

View this
product in
our
webshop



26.08.2026 - Disclaimer: information subject to change.

This LED panel is suitable for installation in (suspended) ceilings of 60x120 cm. A hanging up method is also possible, using a surface mounting kit. The smooth, soft and flicker-free light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

Features

- High quality external driver with optimum heat regulation
- Flicker-free (1%)
- Plug & Play due connection cable and euro plug
- High light efficiency of >100 Lm/W
- 5 year warranty
- Adjustable by a CCT switch in the color temperatures 3000K, 4000K and 6000K

Technical specifications:

Product Name	LED panel 60*120 >100L/W 3-CCT white frame non dim
Ean	8714984934795
Outer box qty	2st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Other
Suitable for emergency lighting	Yes
Nominal current	200 - 218mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	1195mm

26.08.2026 - Disclaimer: information subject to change.

Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	1195mm
Width	595mm
Height/depth	11mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80?? - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6

26.08.2026 - Disclaimer: information subject to change.




Rated lifetime L70/B50 at 25 °C	83000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	48W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Built-in height/depth	11mm
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	4800 - 4800lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), rear side	IP20
With mounting material	Yes
Size	60x120 cm
Colour temperature	3000 - 4000 - 6000K
With connection cord and plug	Yes
Length of power cord	2000mm
Connection type	EU plug

26.08.2026 - Disclaimer: information subject to change.



Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	2000m

26.08.2026 - Disclaimer: information subject to change.

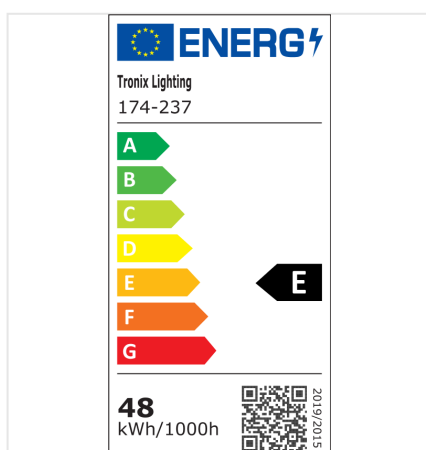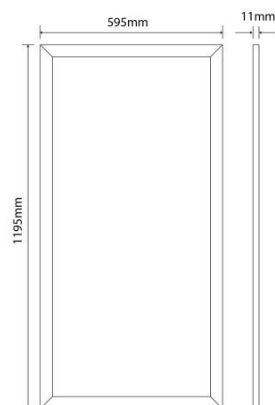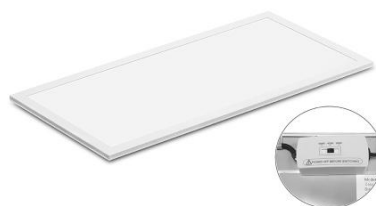

26.08.2026 - Disclaimer: information subject to change.