

LED panel | 60*120 | 20/25/32/36/40W
| 3-CCT | EU plug

ARTICLE NUMBER: 173-042

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Large-format 60x120 cm LED panel with adjustable colour temperature and output. Supplied with EU plug and non-dimmable driver. Efficient and versatile for commercial applications.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** White
- **Connection type:** Plug
- **Unified Glare Ratio (UGR):** 22
- **Luminous flux adjustable:** Steps
- **Luminaire efficacy (lm/W):** 160

Technical specifications:

Product Name	LED panel 60*120 20/25/32/36/40W 3-CCT EU plug
Ean	8714984949416
Outer box qty	4st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	Yes
Nominal current	163 - 163mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	295mm
Built-in diameter	35mm
Constant light output (CLO)	No

24.08.2026 - Disclaimer: information subject to change.

Type of grid	None
Nominal voltage	220 - 240V
Length	595mm
Width	295mm
Height/depth	11mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	83000h

24.08.2026 - Disclaimer: information subject to change.




Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Max. system power	15W
Beam angle adjustable	No
Power factor	0.96
Type of wiring	Ending
Number of poles	2
Built-in height/depth	35mm
Compatible with Casambi	No
Luminaire efficacy	150 - 150lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3000 - 6000lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 2.5mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	20.2
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	30x60 cm
Colour temperature	3000 - 4000 - 5700K

24.08.2026 - Disclaimer: information subject to change.



With connection cord and plug	Yes
Length of power cord	2000mm
Connection type	EU plug
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	2000m

24.08.2026 - Disclaimer: information subject to change.

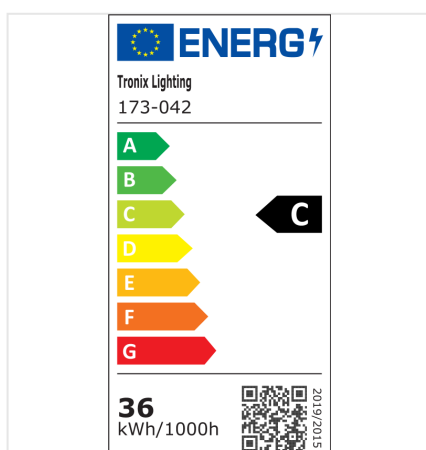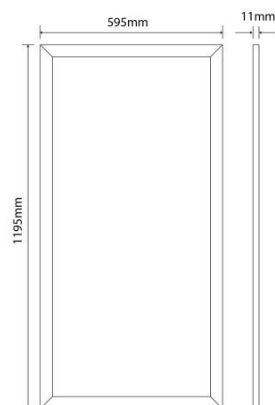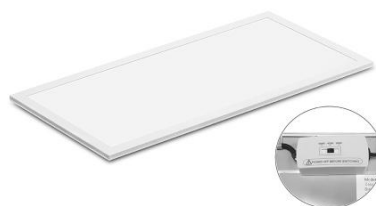

24.08.2026 - Disclaimer: information subject to change.