


# LED panel | 60\*60 | 25W | 3-CCT | 2m cable EU plug

ARTICLE NUMBER: 173-006

View this  
product in  
our  
webshop

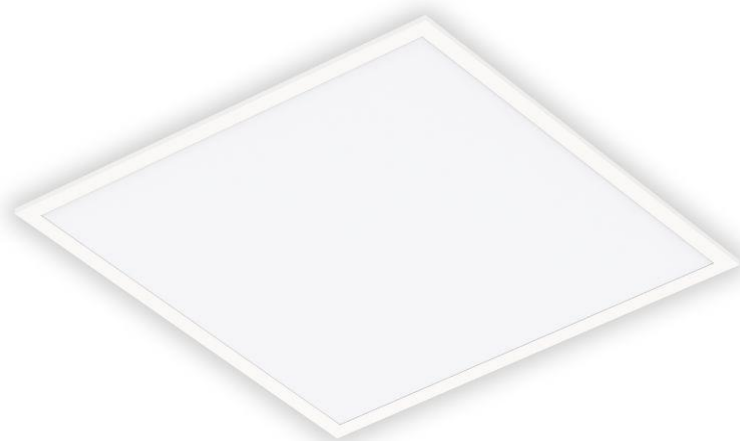

24.08.2026 - Disclaimer: information subject to change.

This LED panel is suitable for installation in (suspended) ceilings of 60\*60 cm. A hanging up method is also possible, using suspension cables or a surface mounting kit. The smooth, soft and flicker-free light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

### Features

- High quality external driver with optimal heat dissipation
- Flicker-free (1%)
- Plug & Play by means of power cord and Euro plug
- CRI >80
- High light efficiency of >150 Lm / W
- 5 years warranty
- Adjustable by means of a CCT switch in the color temperatures 3000K, 4000K and 5700K

### Technical specifications:

|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| Product Name                    | LED panel   60*60   25W   3-CCT   2m cable EU plug |
| Ean                             | 8714984946781                                      |
| Outer box qty                   | 6st                                                |
| Lamp type                       | LED not exchangeable                               |
| Housing material                | Aluminium                                          |
| Housing colour                  | White                                              |
| Material cover                  | Plastic, opal                                      |
| Suitable for emergency lighting | Yes                                                |
| Nominal current                 | 0 - 107mA                                          |
| Voltage type                    | AC                                                 |
| Type of control gear            | LED operating device current-controlled            |
| With control gear               | Yes                                                |
| Built-in length                 | 595mm                                              |

24.08.2026 - Disclaimer: information subject to change.

|                                       |                           |
|---------------------------------------|---------------------------|
| Built-in width                        | 595mm                     |
| Constant light output (CLO)           | No                        |
| Type of grid                          | None                      |
| Nominal voltage                       | 220 - 240V                |
| Length                                | 595mm                     |
| Width                                 | 595mm                     |
| Height/depth                          | 25mm                      |
| Colour of light                       | White                     |
| Colour rendering index CRI            | 80-89                     |
| Exchangeable control gear             | Yes                       |
| Dimming 0-10 V                        | No                        |
| Dimming 1-10 V                        | No                        |
| Dimming DALI                          | No                        |
| Dimming phase cut-off (trailing edge) | No                        |
| With movement sensor                  | No                        |
| With presence detector                | No                        |
| Impact strength                       | IK02                      |
| With light sensor                     | No                        |
| Suitable for surface mounting         | Yes                       |
| Suitable for built-in mounting        | Yes                       |
| Light distribution                    | Symmetric                 |
| Beam angle                            | > 80° - Extreme wide beam |
| Light outlet                          | Indirect                  |
| Dimming RF                            | No                        |
| Dimming Zigbee                        | No                        |
| Light distributor                     | Diffuser lens/optic/panel |
| Surface protection housing            | Lacquered                 |

24.08.2026 - Disclaimer: information subject to change.

|                                                 |                 |
|-------------------------------------------------|-----------------|
| Colour consistency (McAdam ellipse)             | SDCM3           |
| Colour of light adjustable                      | Positions       |
| Luminous flux adjustable                        | No              |
| Max. system power                               | 25W             |
| Beam angle adjustable                           | No              |
| Power factor                                    | 0.91            |
| Type of wiring                                  | Ending          |
| Number of poles                                 | 2               |
| Built-in height/depth                           | 25mm            |
| Compatible with Casambi                         | No              |
| Luminaire efficacy                              | 150 - 150lm/W   |
| Dimmable                                        | No              |
| Rated luminous flux according to IEC 62722-2- 1 | 3750 - 3750lm   |
| Emergency power supply system                   | None            |
| Emergency function monitoring system            | None            |
| Suitable for ceiling mounting                   | Yes             |
| Connectable conductor cross section             | 0.75 - 0.75mm?? |
| Suitable for wall mounting                      | Yes             |
| Suitable for suspended mounting                 | Yes             |
| Suitable for workplace according to EN 12464-1  | No              |
| Unified Glare Ratio (UGR)                       | 21.3            |
| Degree of protection (IP), rear side            | IP20            |
| Degree of protection (IP), front side           | IP20            |
| With mounting material                          | Yes             |
| Size                                            | 60x60 cm        |

24.08.2026 - Disclaimer: information subject to change.



|                    |                     |
|--------------------|---------------------|
| Colour temperature | 3000 - 4000 - 5700K |
|--------------------|---------------------|

|                               |     |
|-------------------------------|-----|
| With connection cord and plug | Yes |
|-------------------------------|-----|

|                      |        |
|----------------------|--------|
| Length of power cord | 2000mm |
|----------------------|--------|

|                 |         |
|-----------------|---------|
| Connection type | EU plug |
|-----------------|---------|




|                |              |
|----------------|--------------|
| Dimming method | Non-dimmable |
|----------------|--------------|

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

|                     |             |
|---------------------|-------------|
| Ambient temperature | -20 - 40??C |
|---------------------|-------------|

|                         |       |
|-------------------------|-------|
| Connection cable length | 2000m |
|-------------------------|-------|

24.08.2026 - Disclaimer: information subject to change.

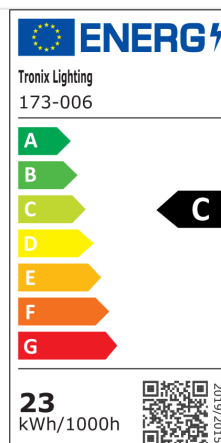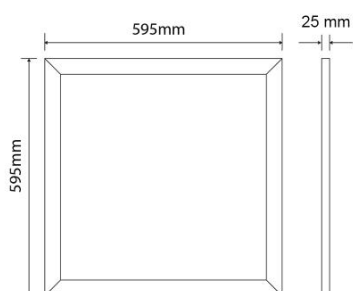

24.08.2026 - Disclaimer: information subject to change.