


LED panel | 60*60 | 25W | 3-CCT | UGR<19 |
30cm cbl GST18i3

ARTICLE NUMBER: 173-015

View this
product in
our
webshop

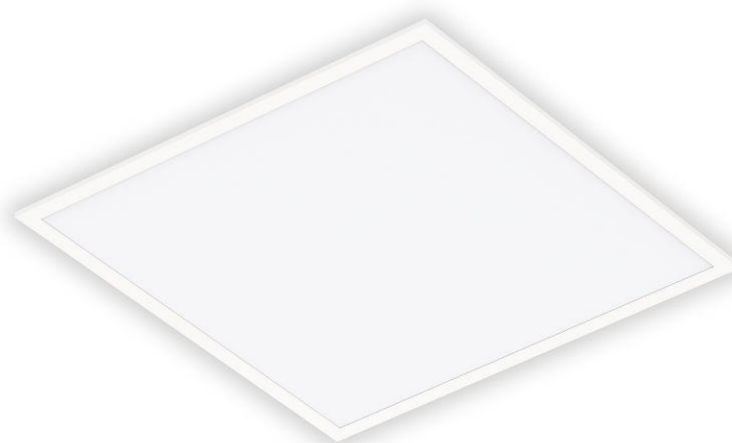

24.08.2026 - Disclaimer: information subject to change.

Efficient LED panel with manually adjustable Colour temperature, high light output, and available with or without UGR<19 louvre. Suitable for a wide range of professional applications.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Built-in height/depth (mm):** 25
- **Unified Glare Ratio (UGR):** 19
- **Connection type:** GST18i3-plug
- **Luminaire efficacy (lm/W):** 139 - 151

Technical specifications:

Product Name	LED panel 60*60 25W 3-CCT UGR19 30cm cbl GST18i3
Ean	8714984946798
Outer box qty	6st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, structured
Suitable for emergency lighting	Yes
Nominal current	0 - 110mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	595mm
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V

24.08.2026 - Disclaimer: information subject to change.

Length	595mm
Width	595mm
Height/depth	25mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	60000h
Colour of light adjustable	Positions
Luminous flux adjustable	No

24.08.2026 - Disclaimer: information subject to change.




Max. system power	25W
Beam angle adjustable	No
Power factor	0.93
Type of wiring	Ending
Number of poles	2
Built-in height/depth	25mm
Compatible with Casambi	No
Luminaire efficacy	150 - 150lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3750 - 3750lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	18
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	60x60 cm
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	Yes
Length of power cord	300mm

24.08.2026 - Disclaimer: information subject to change.



Connection type	GST18i3
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	300m

24.08.2026 - Disclaimer: information subject to change.

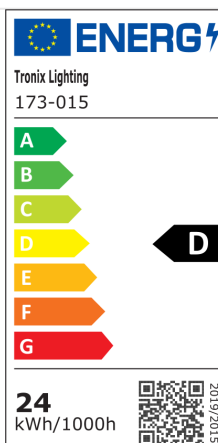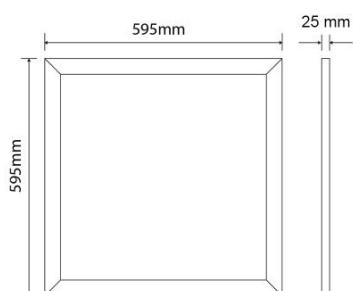

24.08.2026 - Disclaimer: information subject to change.