


LED panel || narrow frame | 30\*120cm |  
tuneable white | UGR<

ARTICLE NUMBER: 174-256

View this  
product in  
our  
webshop

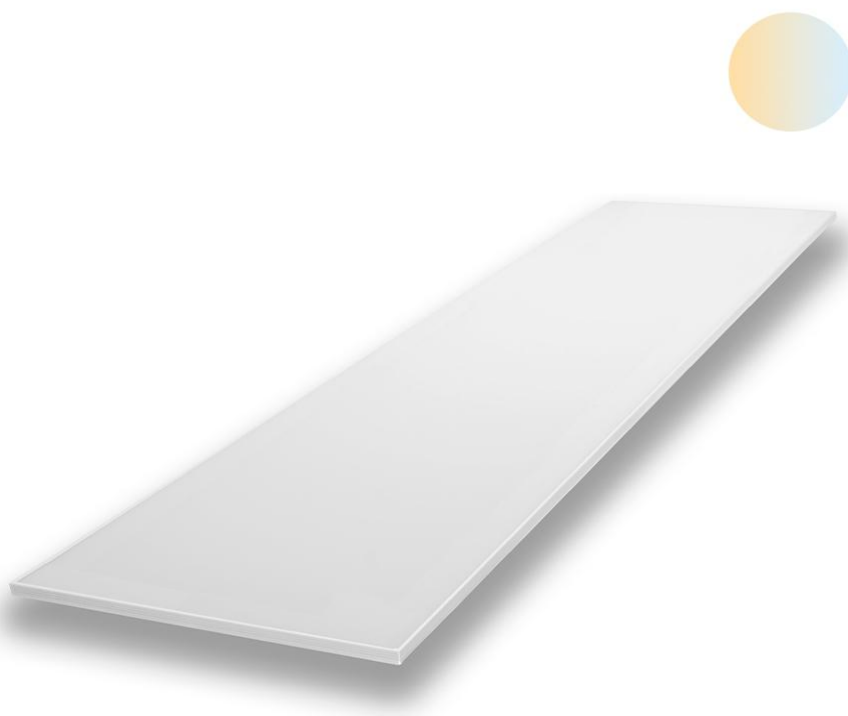

24.08.2026 - Disclaimer: information subject to change.



Create a natural course of light in your building with Tronix tuneable white LED panels, that are completely adjustable in both light intensity and color tone. With the matching controller, not only the amount of light is completely adjustable, but on top of that it is possible to choose from a complete color range, varying from 2700K (warm light) to 6000K (cold light). With these special panels you can create a more natural course of light: from dimmed warm light in the morning, to a higher intensity with cooler light around noon, and then slowly getting back again to a lower light level with warm white light.

## Features

- High light efficiency of >100 Lm/W
- 5 year warranty
- Narrow frame 4mm
- UGR<19 value for minimal discomfort from glare and high productivity
- Driver and desk remote not included (see related products)

## Technical specifications:

|                                 |                                                             |
|---------------------------------|-------------------------------------------------------------|
| Product Name                    | LED panel    narrow frame   30*120cm   tuneable white   UGR |
| Ean                             | 8714984938311                                               |
| Outer box qty                   | 4st                                                         |
| Lamp type                       | LED not exchangeable                                        |
| Housing material                | Aluminium                                                   |
| Housing colour                  | White                                                       |
| Material cover                  | Other                                                       |
| Suitable for emergency lighting | Yes                                                         |
| Nominal current                 | 1050 - 1050mA                                               |
| Voltage type                    | AC                                                          |
| Type of control gear            | LED operating device current-controlled                     |

24.08.2026 - Disclaimer: information subject to change.

|                                       |                            |
|---------------------------------------|----------------------------|
| With control gear                     | No                         |
| Built-in length                       | 1195mm                     |
| Built-in width                        | 295mm                      |
| Constant light output (CLO)           | No                         |
| Type of grid                          | None                       |
| Nominal voltage                       | 34.3 - 34.3V               |
| Length                                | 1195mm                     |
| Width                                 | 295mm                      |
| Height/depth                          | 11mm                       |
| Colour of light                       | White                      |
| Colour rendering index CRI            | 80-89                      |
| Exchangeable control gear             | No                         |
| Dimming 0-10 V                        | Yes                        |
| Dimming 1-10 V                        | Yes                        |
| Dimming DALI                          | Yes                        |
| Dimming phase cut-off (trailing edge) | Yes                        |
| With movement sensor                  | No                         |
| With presence detector                | No                         |
| Impact strength                       | IK02                       |
| With light sensor                     | No                         |
| Suitable for surface mounting         | Yes                        |
| Suitable for built-in mounting        | Yes                        |
| Light distribution                    | Symmetric                  |
| Beam angle                            | > 80?? - Extreme wide beam |
| Light outlet                          | Indirect                   |
| Dimming RF                            | Yes                        |
| Dimming Zigbee                        | Yes                        |

24.08.2026 - Disclaimer: information subject to change.



|                                                |                           |
|------------------------------------------------|---------------------------|
| Light distributor                              | Diffuser lens/optic/panel |
| Surface protection housing                     | Lacquered                 |
| Colour consistency (McAdam ellipse)            | SDCM6                     |
| Rated lifetime L70/B50 at 25 °C                | 83000h                    |
| Colour of light adjustable                     | Continuously variable     |
| Luminous flux adjustable                       | Continuously variable     |
| Max. system power                              | 36W                       |
| Beam angle adjustable                          | No                        |
| Power factor                                   | 0.9                       |
| Type of wiring                                 | Ending                    |
| Number of poles                                | 2                         |
| Built-in height/depth                          | 11mm                      |
| Compatible with Casambi                        | No                        |
| Luminaire efficacy                             | 100 - 100lm/W             |
| Dimmable                                       | Yes                       |
| Rated luminous flux according to IEC 62722-2-1 | 3600 - 3600lm             |
| Emergency power supply system                  | None                      |
| Suitable for ceiling mounting                  | Yes                       |
| Connectable conductor cross section            | 0.75 - 0.75mm²            |
| Suitable for wall mounting                     | Yes                       |
| Suitable for suspended mounting                | Yes                       |
| Suitable for workplace according to EN 12464-1 | Yes                       |
| Unified Glare Ratio (UGR)                      | 19                        |
| Degree of protection (IP), rear side           | IP20                      |
| With mounting material                         | Yes                       |
| Size                                           | 30x120 cm                 |

24.08.2026 - Disclaimer: information subject to change.



|                               |                |
|-------------------------------|----------------|
| Colour temperature            | Tuneable White |
| With connection cord and plug | Yes            |
| Length of power cord          | 2000mm         |
| Connection type               | EU plug        |
| Dimming method                | Optional       |
| Warranty                      | 5 years        |
| Ambient temperature           | -20 - 40??C    |
| Connection cable length       | 2000m          |

24.08.2026 - Disclaimer: information subject to change.

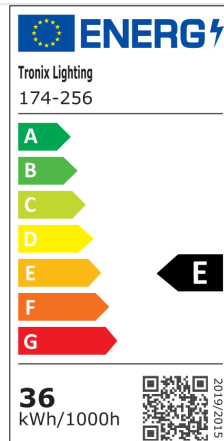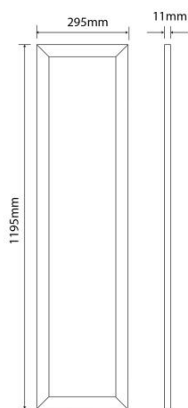

24.08.2026 - Disclaimer: information subject to change.