

LED panel || Ø61cm | 40W | 4000K | CRI>90 |
UGR<19 | non dim

ARTICLE NUMBER: 174-205

View this
product in
our
webshop



05.09.2026 - Disclaimer: information subject to change.

This round LED panel comes with a suspension set and driverbox. This suspension set makes it possible to attach the panel to the ceiling with a maximum height of 130 cm. Due to the smooth, soft and flicker-free light that the LED panel spreads, panels are ideally suited for use in offices and shops, but also for interior lighting in schools and other public spaces.

Features

- High quality external driver with optimal heat regulation
- Flicker-free (1%)
- High light efficiency of >100 Lm/W
- 5 years warranty
- CRI> 90
- UGR<19 value for minimal discomfort from glare and high productivity
- Suspension set and driver box included

Technical specifications:

Product Name	LED panel Ø61cm 40W 4000K CRI>90 UGR19 non dim
Ean	8714984919495
Outer box qty	4st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	167 - 182mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Outer diameter	610mm

05.09.2026 - Disclaimer: information subject to change.

Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Height/depth	15mm
Colour of light	White
Colour rendering index CRI	90-100
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	No
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Diffuser lens/optic/panel
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	83000h
Colour of light adjustable	No

05.09.2026 - Disclaimer: information subject to change.

Luminous flux adjustable	No
Max. system power	40W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2-1	4000 - 4000lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	19
Degree of protection (IP), rear side	IP20
With mounting material	Yes
Colour temperature	4000K
With connection cord and plug	Yes
Length of power cord	2000mm
Connection type	EU plug
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40°C

05.09.2026 - Disclaimer: information subject to change.



Connection cable length

2000m

05.09.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

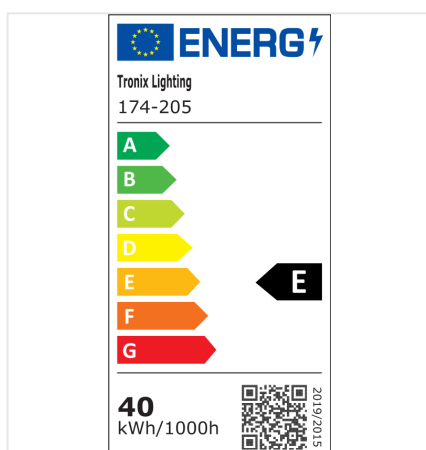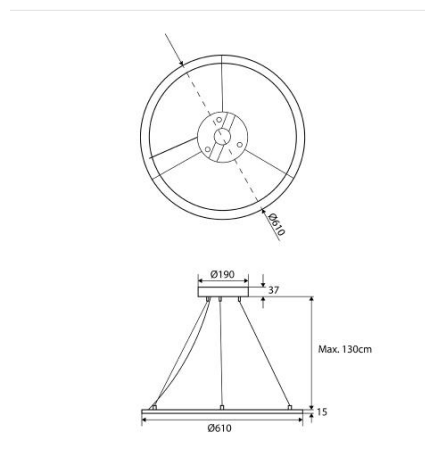

05.09.2026 - Disclaimer: information subject to change.