


LED panel | reflector | 60*60 | 3-CCT | black | GST18i3

ARTICLE NUMBER: 173-065

View this
product in
our
webshop

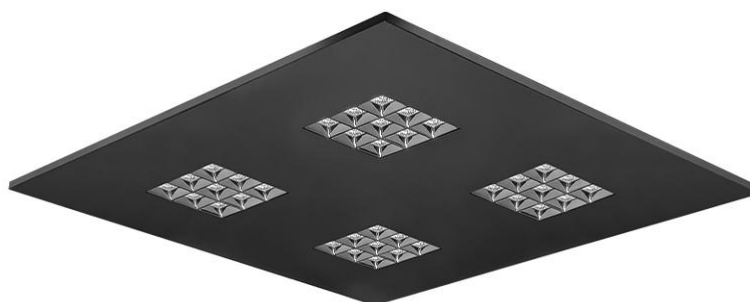

24.08.2026 - Disclaimer: information subject to change.



This versatile LED panel provides optimal light comfort with integrated reflectors for smooth, uniform light output. Ideal for various work and living environments.

Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** Black
- **Connection type:** Plug
- **Light distributor:** Reflector
- **Unified Glare Ratio (UGR):** 17
- **Luminaire efficacy (lm/W):** 139 - 155

Technical specifications:

Product Name	LED panel reflector 60*60 3-CCT black GST18i3
Ean	8714984950764
Outer box qty	5st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Other
Suitable for emergency lighting	Yes
Nominal current	112 - 112mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Built-in length	595mm
Built-in width	595mm
Constant light output (CLO)	No
Type of grid	None

24.08.2026 - Disclaimer: information subject to change.

Nominal voltage	220 - 240V
Length	595mm
Width	595mm
Height/depth	12mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct/indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Reflector
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions

24.08.2026 - Disclaimer: information subject to change.

Luminous flux adjustable	No
Max. system power	26W
Beam angle adjustable	No
Power factor	0.93
Type of wiring	Ending
Number of poles	2
Built-in height/depth	12mm
Compatible with Casambi	No
Luminaire efficacy	150 - 150lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	3750 - 3750lm
Emergency power supply system	None
Emergency function monitoring system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	17
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP20
With mounting material	Yes
Size	60x60 cm
Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	Yes

24.08.2026 - Disclaimer: information subject to change.



Length of power cord	300mm
Connection type	GST18i3
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 45??C
Connection cable length	300m

24.08.2026 - Disclaimer: information subject to change.






CARE



SHARE



CONNECT

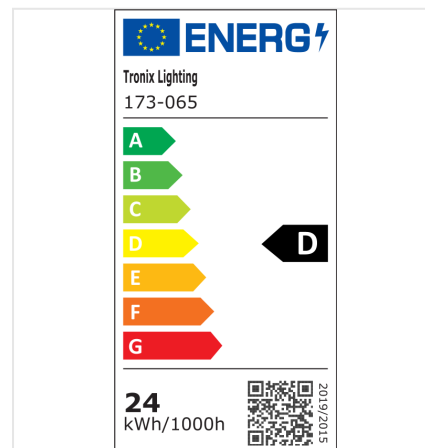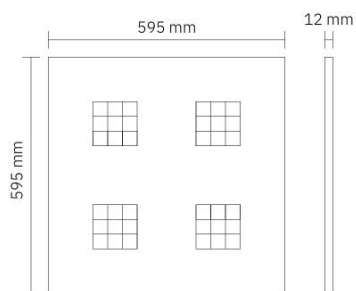

24.08.2026 - Disclaimer: information subject to change.