


LED panel | reflector | 60\*60 | 3-CCT |  
white | EU plug

ARTICLE NUMBER: 173-062

View this  
product in  
our  
webshop

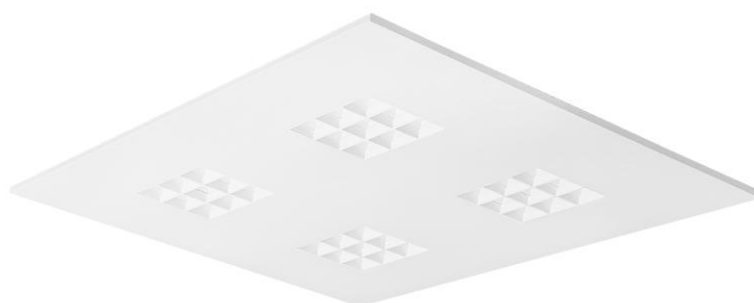

24.08.2026 - Disclaimer: information subject to change.

This versatile LED panel provides optimal light comfort with integrated reflectors for smooth, uniform light output. Ideal for various work and living environments.

## Key product features:

- **Colour temperature (K):** 3000 - 5700
- **Housing colour:** White
- **Connection type:** Plug
- **Light distributor:** Reflector
- **Unified Glare Ratio (UGR):** 17
- **Luminaire efficacy (lm/W):** 130 - 141

## Technical specifications:

|                                 |                                                         |
|---------------------------------|---------------------------------------------------------|
| Product Name                    | LED panel   reflector   60*60   3-CCT   white   EU plug |
| Ean                             | 8714984950733                                           |
| Outer box qty                   | 5st                                                     |
| Lamp type                       | LED not exchangeable                                    |
| Housing material                | Aluminium                                               |
| Housing colour                  | White                                                   |
| Material cover                  | Other                                                   |
| Suitable for emergency lighting | Yes                                                     |
| Nominal current                 | 112 - 112mA                                             |
| Voltage type                    | AC                                                      |
| Type of control gear            | LED operating device current-controlled                 |
| With control gear               | Yes                                                     |
| Built-in length                 | 595mm                                                   |
| Built-in width                  | 595mm                                                   |
| Constant light output (CLO)     | No                                                      |
| Type of grid                    | None                                                    |

24.08.2026 - Disclaimer: information subject to change.

|                                       |                           |
|---------------------------------------|---------------------------|
| Nominal voltage                       | 220 - 240V                |
| Length                                | 595mm                     |
| Width                                 | 595mm                     |
| Height/depth                          | 12mm                      |
| Colour of light                       | White                     |
| Colour rendering index CRI            | 80-89                     |
| Exchangeable control gear             | No                        |
| Dimming 0-10 V                        | No                        |
| Dimming 1-10 V                        | No                        |
| Dimming DALI                          | No                        |
| Dimming phase cut-off (trailing edge) | No                        |
| With movement sensor                  | No                        |
| With presence detector                | No                        |
| Impact strength                       | IK02                      |
| With light sensor                     | No                        |
| Suitable for surface mounting         | Yes                       |
| Suitable for built-in mounting        | Yes                       |
| Light distribution                    | Symmetric                 |
| Beam angle                            | > 80° - Extreme wide beam |
| Light outlet                          | Direct                    |
| Dimming RF                            | No                        |
| Dimming Zigbee                        | No                        |
| Light distributor                     | Reflector                 |
| Surface protection housing            | Powder coating            |
| Colour consistency (McAdam ellipse)   | SDCM6                     |
| Rated lifetime L70/B50 at 25 °C       | 50000h                    |
| Colour of light adjustable            | Positions                 |

24.08.2026 - Disclaimer: information subject to change.




|                                                 |                     |
|-------------------------------------------------|---------------------|
| Luminous flux adjustable                        | No                  |
| Max. system power                               | 26W                 |
| Beam angle adjustable                           | No                  |
| Power factor                                    | 0.93                |
| Type of wiring                                  | Ending              |
| Number of poles                                 | 2                   |
| Built-in height/depth                           | 12mm                |
| Compatible with Casambi                         | No                  |
| Luminaire efficacy                              | 150 - 150lm/W       |
| Dimmable                                        | No                  |
| Rated luminous flux according to IEC 62722-2- 1 | 3750 - 3750lm       |
| Emergency power supply system                   | None                |
| Emergency function monitoring system            | None                |
| Suitable for ceiling mounting                   | Yes                 |
| Connectable conductor cross section             | 0.75 - 0.75mm??     |
| Suitable for wall mounting                      | Yes                 |
| Suitable for suspended mounting                 | Yes                 |
| Suitable for workplace according to EN 12464-1  | Yes                 |
| Unified Glare Ratio (UGR)                       | 17                  |
| Degree of protection (IP), rear side            | IP20                |
| Degree of protection (IP), front side           | IP20                |
| With mounting material                          | Yes                 |
| Size                                            | 60x60 cm            |
| Colour temperature                              | 3000 - 4000 - 5700K |
| With connection cord and plug                   | Yes                 |

24.08.2026 - Disclaimer: information subject to change.



|                         |              |
|-------------------------|--------------|
| Length of power cord    | 2000mm       |
| Connection type         | EU plug      |
| Dimming method          | Non-dimmable |
| Warranty                | 5 years      |
| Ambient temperature     | -20 - 45??C  |
| Connection cable length | 2000m        |

24.08.2026 - Disclaimer: information subject to change.

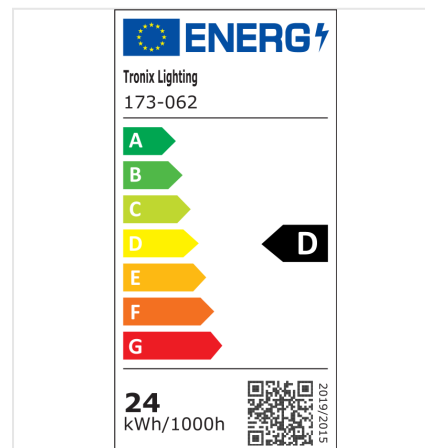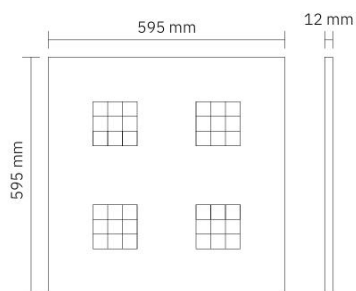

24.08.2026 - Disclaimer: information subject to change.