


LED panel | reflector | 60*60 | 3-CCT | white
frame | UGR<17

ARTICLE NUMBER: 174-270

View this
product in
our
webshop

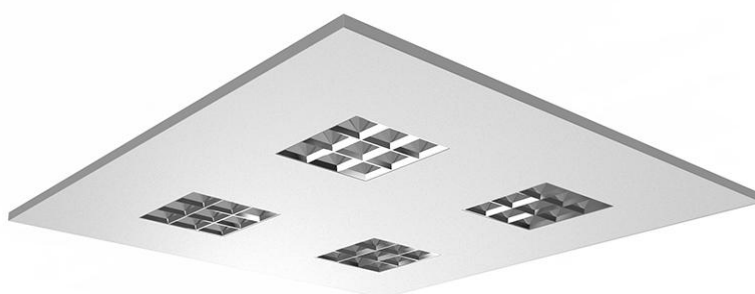

25.08.2026 - Disclaimer: information subject to change.

This LED panel is suitable for installation in (suspended) ceilings of 60x60 cm. A hanging up method is also possible, using suspension cables or a surface mounting kit. The smooth, soft and flicker-free light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

Features

- High quality external driver with optimum heat regulation
- Flicker-free (1%)
- Plug & Play due connection cable and euro plug
- High light efficiency of >130 Lm/W at 3000K and >140 Lm/W at 4000K or 5700K
- 5 year warranty
- Very low UGR<17 value for minimal discomfort from glare and high productivity
- Adjustable by a CCT switch in the color temperatures 3000K, 4000K and 5700K

Technical specifications:

Product Name	LED panel reflector 60*60 3-CCT white frame UGR17
Ean	8714984924383
Outer box qty	5st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Material cover	Other
Suitable for emergency lighting	Yes
Nominal current	117 - 117mA
Voltage type	AC
Type of control gear	LED operating device current-controlled

25.08.2026 - Disclaimer: information subject to change.

With control gear	Yes
Built-in length	595mm
Built-in width	595mm
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	595mm
Width	595mm
Height/depth	16mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK02
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Light distribution	Symmetric
Beam angle	41-80° - Wide beam
Light outlet	Direct/indirect
Dimming RF	No
Dimming Zigbee	No

25.08.2026 - Disclaimer: information subject to change.




Light distributor	Reflector
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	83000h
Colour of light adjustable	Positions
Luminous flux adjustable	No
Max. system power	27W
Beam angle adjustable	No
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Built-in height/depth	16mm
Compatible with Casambi	No
Luminaire efficacy	133 - 146lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2-1	3687 - 3875lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	Yes
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	17
Degree of protection (IP), rear side	IP20
With mounting material	Yes
Size	60x60 cm

25.08.2026 - Disclaimer: information subject to change.



Colour temperature	3000 - 4000 - 5700K
With connection cord and plug	Yes
Length of power cord	2000mm
Connection type	EU plug
Dimming method	Non-dimmable
Warranty	5 years
Ambient temperature	-20 - 40??C
Connection cable length	2000m

25.08.2026 - Disclaimer: information subject to change.

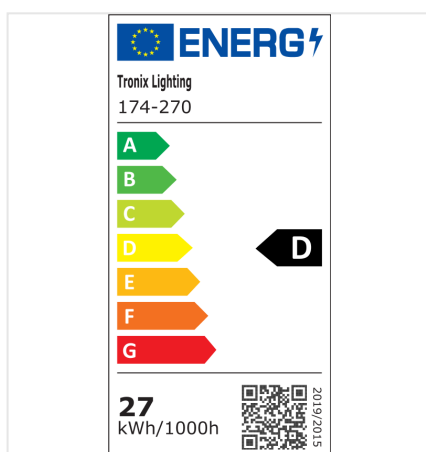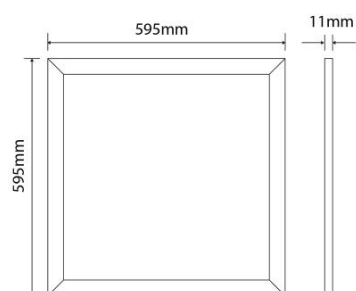

25.08.2026 - Disclaimer: information subject to change.