

LED ropelight || 230V | 44m | WW 3000K

ARTICLE NUMBER: 055-508

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.

Looking for a replacement for the Tronix traditional rope light? This rope light consists of LED, but comes close to the traditional (incandescent) rope light when it comes to price and application options. In addition, the LED version is more energy efficient, more resistant to shocks and the LED rope light develops less heat.

The rope light 3000K has been specially developed for the creative lighting needs during Christmas. Think of making figures, or as a light line on a house during the holiday season. In addition, this rope light is an excellent solution when it comes to lighting for the construction site, thanks to the strong combination of its low price, sturdy materials and large amount of light.

Features

- Same material and quality as the Tronix standard LED rope lights
- More energy efficient, more resistant to shocks and less heat generation than the traditional (incandescent) rope light
- Cheaper than standard LED rope light due to the use of 24 LEDs per meter and the total length of 44 metres. Cannot be cut

Technical specifications:

Product Name	LED ropelight 230V 44m WW 3000K
Ean	8714984941151
Outer box qty	1st
Model	Hose
Lamp type	LED not exchangeable
Lamp voltage	0 - 230V
Number of nodes per meter	24
Lamp power per meter	2.1W
Beam angle	360°
Voltage type	AC

25.08.2026 - Disclaimer: information subject to change.

Type of control gear	Not required
Input voltage tracklights	230V
With protective cover	No
Degree of protection (IP)	IP65
Self-adhesive	No
Luminous flux per meter	66lm
Total length	44m
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	80-89
Diameter	13mm
Exchangeable control gear	No
Connection type	Other
Rated lifetime L70/B50 at 25 °C	20000h
Colour of light adjustable	No
Luminous flux per foot	20.12lm
Luminous flux adjustable	Continuously variable
Max. system power	92.4W
Beam angle adjustable	No
Luminaire efficacy	31.4lm/W
Power factor	0.9
Type of wiring	Ending
Number of poles	2
Type of power supply	Mains power supply
Connectable conductor cross section	0.75 - 0.75mm ²
Colour temperature	3000K
Warranty	2 years

25.08.2026 - Disclaimer: information subject to change.




Ambient temperature	-20 - 50°C
---------------------	------------

Lowest bending radius	100mm
-----------------------	-------

Connection cable length	1.5m
-------------------------	------

25.08.2026 - Disclaimer: information subject to change.

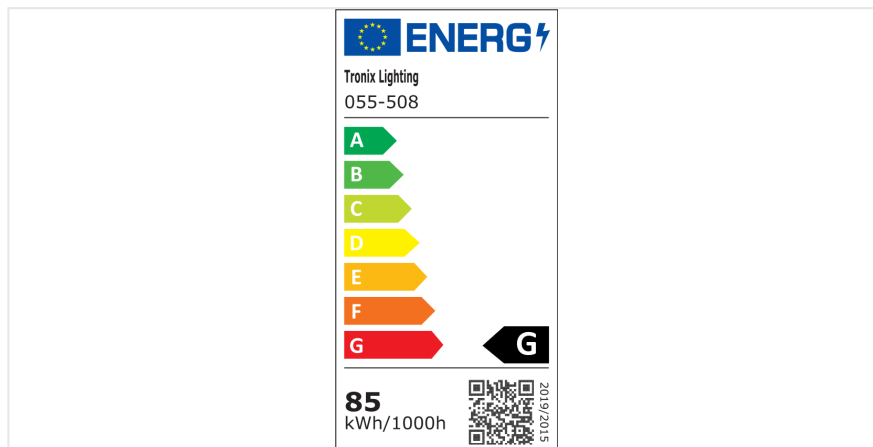

25.08.2026 - Disclaimer: information subject to change.