

# LED spot || universal COB | 350mA | 3,3W | 3000K

ARTICLE NUMBER: 148-146

View this  
product in  
our  
webshop



27.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



Tronix modules are equipped with a Plug&Play connector. The connector is easy to connect to a module-extension cable (up to 10 meters), a module-divider (up to 6 pieces), or directly to a Tronix driver. This makes even the most complicated lighting plans easy to realize!

## Specifications

- Excellent color rendering CRI >90
- Perfectly compatible with protocols > DALI, Casambi, Triac, 1-10V
- Good heat dissipation and long lifespan
- High quality aluminum with powder coating, or aluminum anodized

**Universal module:** Can be combined with regular 50 mm plates for easy installation.

## Technical specifications:



|                               |                                                  |
|-------------------------------|--------------------------------------------------|
| Product Name                  | LED spot    universal COB   350mA   3,3W   3000K |
| Ean                           | 8714984916838                                    |
| Colour                        | White                                            |
| Housing colour                | Aluminium                                        |
| Connection type               | Other                                            |
| Height                        | 35mm                                             |
| Diameter                      | 50mm                                             |
| Lamp power                    | 3.3 - 3.3W                                       |
| Colour temperature            | 3000K                                            |
| Beam angle                    | 40 - 40??                                        |
| Voltage type                  | DC                                               |
| Operating voltage             | 9.4 - 9.4V                                       |
| Operating current             | 350 - 350mA                                      |
| Suitable for constant voltage | No                                               |
| Suitable for constant current | Yes                                              |

27.08.2026 - Disclaimer: information subject to change.



|                            |                 |
|----------------------------|-----------------|
| Average nominal lifetime   | 30000h          |
| Degree of protection (IP)  | IP44            |
| Luminous flux              | 300 - 300lm     |
| Specific luminous efficacy | 90.9 - 90.9lm/W |
| Number of LEDs             | 1               |
| External driver required   | Yes             |
| Warranty                   | 3 years         |

27.08.2026 - Disclaimer: information subject to change.

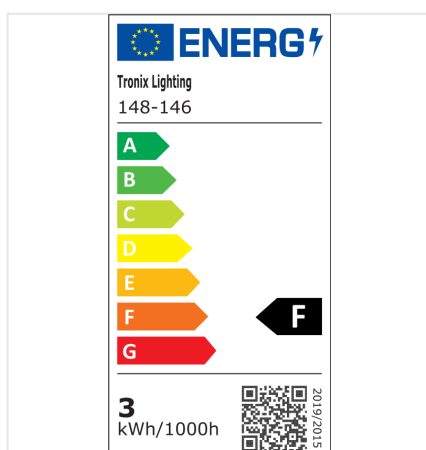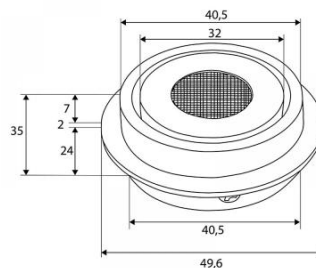

27.08.2026 - Disclaimer: information subject to change.