

LED strip || 24V | 120LED/m 3528 | 5m | IP20  
| 7000K | CRI>9

ARTICLE NUMBER: 127-067

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.

24V flexible LED strip (12 LEDs = 100mm) with 3M adhesive tape on the back for easy installation.

Maximum 5 meters of LED strip in one single length. Looking to connect multiple lengths to one single power supply? In that case, choose separate LED strips of up to 5 meters each. For a 10-meter run, simply power the strip from both ends.

### Features

- IP20 for indoor use
- High color rendering index CRI>90
- Constant color temperature MacAdam: <3
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation



### Technical specifications:

|                               |                                                              |
|-------------------------------|--------------------------------------------------------------|
| Product Name                  | LED strip    24V   120LED/m 3528   5m   IP20   7000K   CRI>9 |
| Ean                           | 8714984916296                                                |
| Model                         | Strip                                                        |
| Lamp type                     | LED not exchangeable                                         |
| Lamp voltage                  | 0 - 24V                                                      |
| Number of nodes per meter     | 120                                                          |
| Lamp power per meter          | 9.6W                                                         |
| Beam angle                    | 120°                                                         |
| Voltage type                  | DC                                                           |
| Type of control gear          | LED operating device voltage-controlled                      |
| Input voltage tracklights     | 24V                                                          |
| With protective cover         | No                                                           |
| Length of particular segments | 50mm                                                         |
| Degree of protection (IP)     | IP20                                                         |

24.08.2026 - Disclaimer: information subject to change.

|                                     |                              |
|-------------------------------------|------------------------------|
| Self-adhesive                       | Yes                          |
| Luminous flux per meter             | 649lm                        |
| Total length                        | 5m                           |
| Width                               | 8mm                          |
| Height/depth                        | 2mm                          |
| Colour of light                     | White                        |
| Suitable for dimmer                 | Yes                          |
| Colour rendering index CRI          | 90-100                       |
| Exchangeable control gear           | Yes                          |
| Connection type                     | Other                        |
| Rated lifetime L70/B50 at 25 °C     | 54000h                       |
| Colour of light adjustable          | No                           |
| Luminous flux per foot              | 197.82lm                     |
| Luminous flux adjustable            | Continuously variable        |
| LED type                            | SMD                          |
| Max. system power                   | 48W                          |
| Beam angle adjustable               | No                           |
| Luminaire efficacy                  | 67.6lm/W                     |
| Power factor                        | 1                            |
| Type of wiring                      | Loop-through wiring included |
| Number of poles                     | 2                            |
| Connectable conductor cross section | 0.5 - 2.5mm <sup>2</sup>     |
| Colour temperature                  | 7000K                        |
| Warranty                            | 3 years                      |
| Ambient temperature                 | -20 - 50°C                   |
| Lowest bending radius               | 50mm                         |

24.08.2026 - Disclaimer: information subject to change.

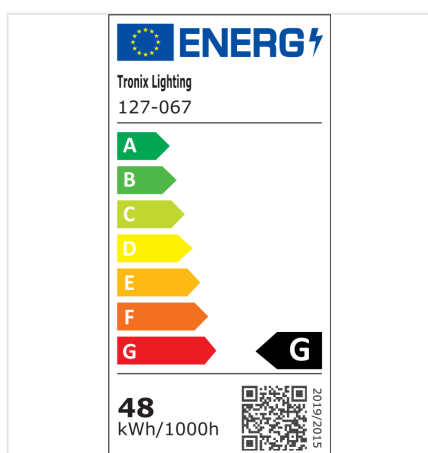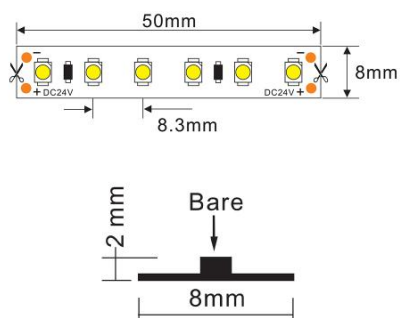

24.08.2026 - Disclaimer: information subject to change.