

# LED strip || 24V | 120LED/m side | 5m | IP20 | 6000K

ARTICLE NUMBER: 127-077

View this  
product in  
our  
webshop



14.07.2026 - Disclaimer: information subject to change.

LED strip with LEDs on the side for vertical light output. At round applications such as round coves, the light of this LED strip shines upwards or downwards. With 3M adhesive tape on the back for easy installation.

Maximum 5 meters of LED strip in one single length. Looking to connect multiple lengths to one single power supply? In that case, choose separate LED strips of up to 5 meters each. For a 10-meter run, simply power the strip from both ends.

### Features

- 12 LEDs = 100 mm
- IP20 for indoor use
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation



### Technical specifications:

|                           |                                                      |
|---------------------------|------------------------------------------------------|
| Product Name              | LED strip    24V   120LED/m side   5m   IP20   6000K |
| Ean                       | 8714984921658                                        |
| Outer box qty             | 25st                                                 |
| Model                     | Strip                                                |
| Lamp type                 | LED not exchangeable                                 |
| Lamp voltage              | 0 - 24V                                              |
| Number of nodes per meter | 120                                                  |
| Lamp power per meter      | 12W                                                  |
| Beam angle                | 120°                                                 |
| Voltage type              | DC                                                   |
| Type of control gear      | LED operating device voltage-controlled              |
| Input voltage tracklights | 24V                                                  |
| With protective cover     | No                                                   |

14.07.2026 - Disclaimer: information subject to change.

|                                     |                              |
|-------------------------------------|------------------------------|
| Length of particular segments       | 50mm                         |
| Degree of protection (IP)           | IP20                         |
| Self-adhesive                       | Yes                          |
| Luminous flux per meter             | 1200lm                       |
| Total length                        | 5m                           |
| Width                               | 8mm                          |
| Height/depth                        | 2mm                          |
| Colour of light                     | White                        |
| Suitable for dimmer                 | Yes                          |
| Colour rendering index CRI          | 80-89                        |
| Exchangeable control gear           | Yes                          |
| Connection type                     | Other                        |
| Rated lifetime L70/B50 at 25 °C     | 54000h                       |
| Colour of light adjustable          | No                           |
| Luminous flux per foot              | 365.76lm                     |
| Luminous flux adjustable            | Continuously variable        |
| LED type                            | SMD                          |
| Max. system power                   | 60W                          |
| Beam angle adjustable               | No                           |
| Luminaire efficacy                  | 100lm/W                      |
| Power factor                        | 1                            |
| Type of wiring                      | Loop-through wiring included |
| Number of poles                     | 2                            |
| Connectable conductor cross section | 0.5 - 2.5mm <sup>2</sup>     |
| Colour temperature                  | 6000K                        |
| Warranty                            | 3 years                      |

14.07.2026 - Disclaimer: information subject to change.

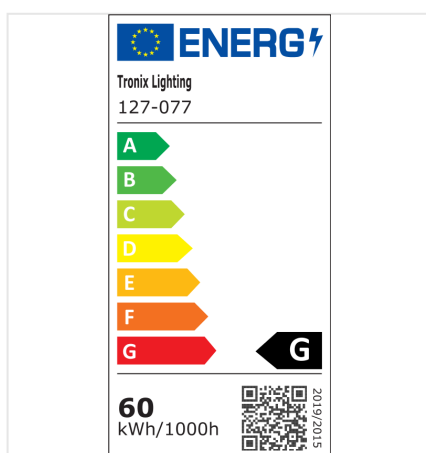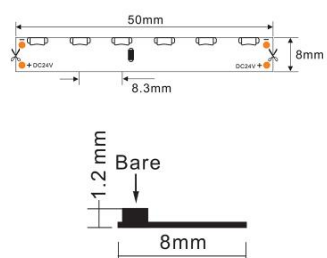

14.07.2026 - Disclaimer: information subject to change.