

LED strip | 24V | 180LED/m 3528 | 5m | IP65 |
3000K | CRI>90

ARTICLE NUMBER: 127-095

View this
product in
our
webshop



26.08.2026 - Disclaimer: information subject to change.



Powerful 24V LED strip with 180 pcs 3528 LEDs per meter. Delivers a sleek, uniform light output with stable performance for visible and indirect applications.

Key product features:

- **Number of nodes per meter:** 180
- **Lamp power per meter (W):** 14.4
- **Colour temperature (K):** 3000
- **Width (mm):** 10
- **Length of particular sections (mm):** 33.3
- **Degree of protection (IP):** IP65
- **Luminous flux per meter (Lm):** 901



Technical specifications:

Product Name	LED strip 24V 180LED/m 3528 5m IP65 3000K CRI>90
Ean	8714984927438
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	180
Lamp power per meter	14.4W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	33mm
Degree of protection (IP)	IP65

26.08.2026 - Disclaimer: information subject to change.

Self-adhesive	Yes
Luminous flux per meter	847lm
Total length	5m
Width	10mm
Height/depth	2mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	258.17lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	72W
Beam angle adjustable	No
Luminaire efficacy	59lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	3000K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

26.08.2026 - Disclaimer: information subject to change.

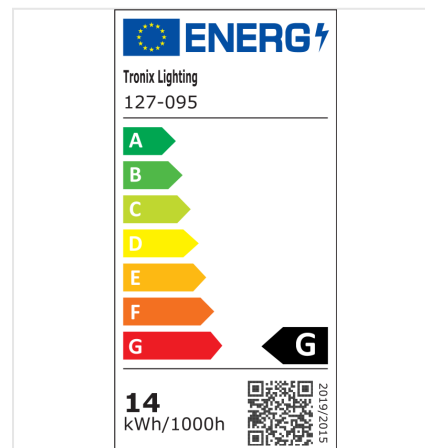

26.08.2026 - Disclaimer: information subject to change.