


LED strip | 24V | 240LED/m 2010 | 5m | IP20 |
2700K | CRI>95

ARTICLE NUMBER: 127-183

View this
product in
our
webshop

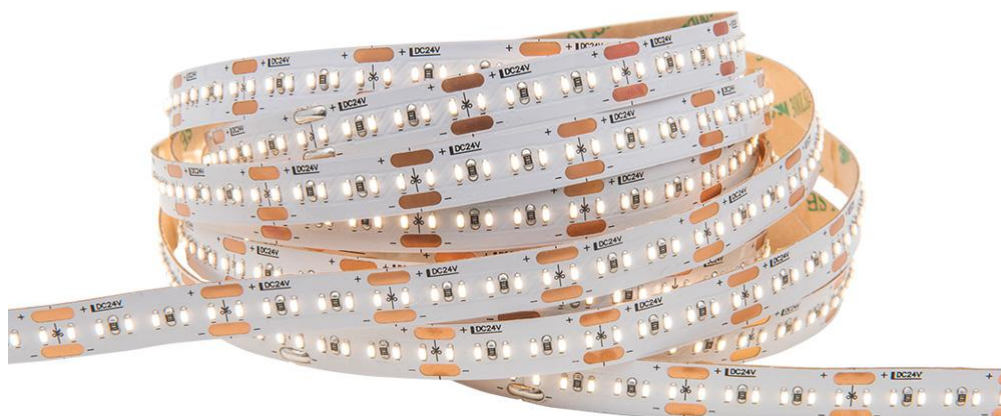

24.08.2026 - Disclaimer: information subject to change.



High-quality 24V LED strip with 240 LEDs per meter (2010 SMD). High light output, uniform light appearance, small cutting section, and maximum flexibility for customised projects.

Key product features:

- **Number of nodes per meter:** 240
- **Lamp power per meter (W):** 19.2
- **Colour temperature (K):** 2700
- **Width (mm):** 10
- **Length of particular sections (mm):** 25
- **Degree of protection (IP):** IP20
- **Luminous flux per meter (Lm):** 1524



Technical specifications:

Product Name	LED strip 24V 240LED/m 2010 5m IP20 2700K CRI>95
Ean	8714984935860
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	240
Lamp power per meter	19.2W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	25mm
Degree of protection (IP)	IP20

24.08.2026 - Disclaimer: information subject to change.

Self-adhesive	Yes
Luminous flux per meter	1530lm
Total length	5m
Width	10mm
Height/depth	1.4mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	466.34lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	96W
Beam angle adjustable	No
Luminaire efficacy	80lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	2700K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

24.08.2026 - Disclaimer: information subject to change.

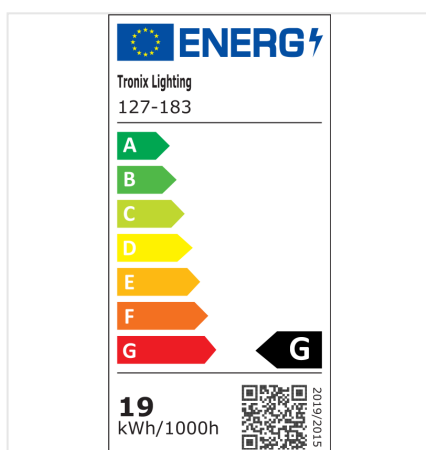

24.08.2026 - Disclaimer: information subject to change.