

LED strip | 24V | 364LED/m TW | 5 meter |
IP20 | 1800-6500K

ARTICLE NUMBER: 127-189

View this
product in
our
webshop



04.08.2026 - Disclaimer: information subject to change.

Tunable White LED strip with 364 LEDs per meter and an extra wide colour temperature range from 1800K to 6500K. Designed for high-end custom lighting with 38.46 mm cutting section.

Key product features

- **Number of nodes per meter:** 364
- **Lamp power per meter (W):** 18
- **Colour temperature (K):** 1800 - 6500
- **Width (mm):** 10
- **Length of particular sections (mm):** 38.46
- **Degree of protection (IP):** IP20
- **Luminous flux per meter (Lm):** 1443




Technical specifications:

Product Name	LED strip 24V 364LED/m TW 5 meter IP20 1800-6500K
Ean	8714984948839
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	364
Lamp power per meter	20W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	38.46mm
Degree of protection (IP)	IP20

04.08.2026 - Disclaimer: information subject to change.

Self-adhesive	Yes
Luminous flux per meter	1710lm
Total length	5m
Width	10mm
Height/depth	1.4mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	521.21lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	100W
Beam angle adjustable	No
Luminaire efficacy	80lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	3
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	Tuneable White
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

04.08.2026 - Disclaimer: information subject to change.

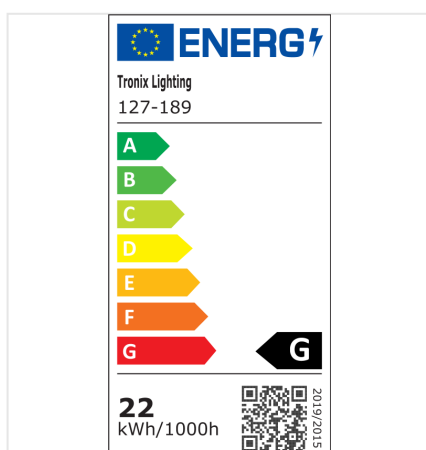

04.08.2026 - Disclaimer: information subject to change.