

LED strip || 24V | 36LED/m 5050 | 5m | IP67 |
3500K | CRI>90

ARTICLE NUMBER: 127-098

View this
product in
our
webshop



27.08.2026 - Disclaimer: information subject to change.

AS LONG AS SUPPLIES LAST!

Alternative options:

127-078

24V flexible LED strip with 3M adhesive tape on the back for easy installation.

Maximum 5 meters of LED strip in one single length. Looking to connect multiple lengths to one single power supply? In that case, choose separate LED strips of up to 5 meters each. For a 10-meter run, simply power the strip from both ends.

Features

- IP67 for outdoor use
- High color rendering index CRI>90
- Constant color temperature MacAdam: <3
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation

Technical specifications:

Product Name	LED strip 24V 36LED/m 5050 5m IP67 3500K CRI>90
Ean	8714984907348
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	36
Lamp power per meter	8.6W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V

27.08.2026 - Disclaimer: information subject to change.



With protective cover	Yes
Length of particular segments	167mm
Degree of protection (IP)	IP67
Self-adhesive	Yes
Luminous flux per meter	583lm
Total length	5m
Width	12mm
Height/depth	4mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	177.7lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	43W
Beam angle adjustable	No
Luminaire efficacy	67.8lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Type of power supply	Mains power supply
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	3500K

27.08.2026 - Disclaimer: information subject to change.



Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

27.08.2026 - Disclaimer: information subject to change.

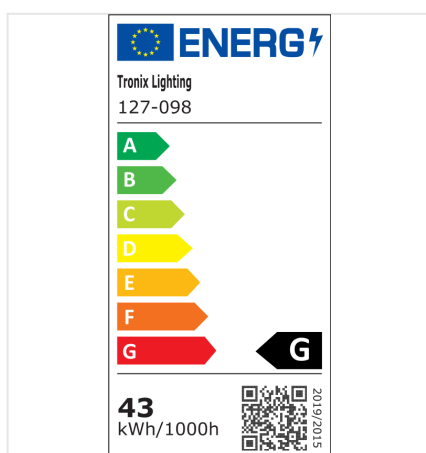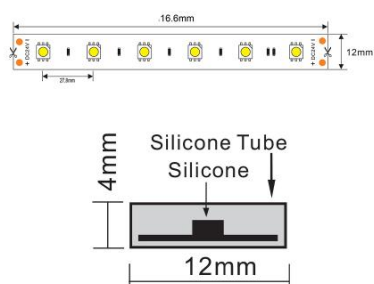

27.08.2026 - Disclaimer: information subject to change.