

LED strip | 24V | 560LED/m 2010 | 5m | IP65 |  
4000K | CRI>90

ARTICLE NUMBER: 127-195

View this  
product in  
our  
webshop



14.07.2026 - Disclaimer: information subject to change.



Ultra-dense 24V LED strip with 560 LEDs per meter. Provides a fully uniform light line, even in shallow profiles – ideal for high-end visible applications.

## Key product features:

- **Number of nodes per meter:** 560
- **Lamp power per meter (W):** 20
- **Colour temperature (K):** 4000
- **Width (mm):** 10
- **Length of particular sections (mm):** 12.5
- **Degree of protection (IP):** IP65
- **Luminous flux per meter (Lm):** 2202




## Technical specifications:

|                               |                                                              |
|-------------------------------|--------------------------------------------------------------|
| Product Name                  | LED strip   24V   560LED/m 2010   5m   IP65   4000K   CRI>90 |
| Ean                           | 8714984944626                                                |
| Outer box qty                 | 25st                                                         |
| Model                         | Strip                                                        |
| Lamp type                     | LED not exchangeable                                         |
| Lamp voltage                  | 0 - 24V                                                      |
| Number of nodes per meter     | 560                                                          |
| Lamp power per meter          | 20W                                                          |
| Beam angle                    | 120°                                                         |
| Voltage type                  | DC                                                           |
| Type of control gear          | LED operating device voltage-controlled                      |
| Input voltage tracklights     | 24V                                                          |
| With protective cover         | No                                                           |
| Length of particular segments | 12.5mm                                                       |
| Degree of protection (IP)     | IP65                                                         |

14.07.2026 - Disclaimer: information subject to change.

|                                     |                              |
|-------------------------------------|------------------------------|
| Self-adhesive                       | Yes                          |
| Luminous flux per meter             | 2114lm                       |
| Total length                        | 5m                           |
| Width                               | 10mm                         |
| Height/depth                        | 1.4mm                        |
| Colour of light                     | White                        |
| Suitable for dimmer                 | Yes                          |
| Colour rendering index CRI          | 90-100                       |
| Exchangeable control gear           | Yes                          |
| Connection type                     | Other                        |
| Rated lifetime L70/B50 at 25 °C     | 54000h                       |
| Colour of light adjustable          | No                           |
| Luminous flux per foot              | 644.35lm                     |
| Luminous flux adjustable            | Continuously variable        |
| LED type                            | SMD                          |
| Max. system power                   | 100W                         |
| Beam angle adjustable               | No                           |
| Luminaire efficacy                  | 98lm/W                       |
| Power factor                        | 1                            |
| Type of wiring                      | Loop-through wiring included |
| Number of poles                     | 2                            |
| Connectable conductor cross section | 0.5 - 2.5mm <sup>2</sup>     |
| Colour temperature                  | 4000K                        |
| Warranty                            | 3 years                      |

14.07.2026 - Disclaimer: information subject to change.

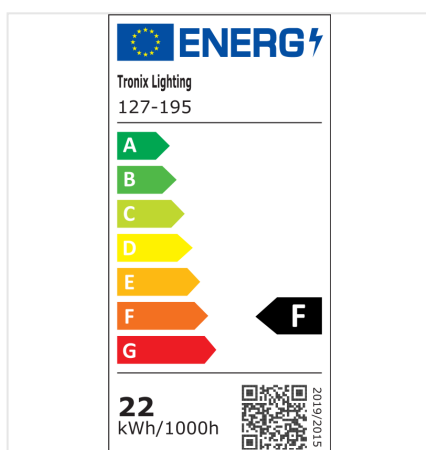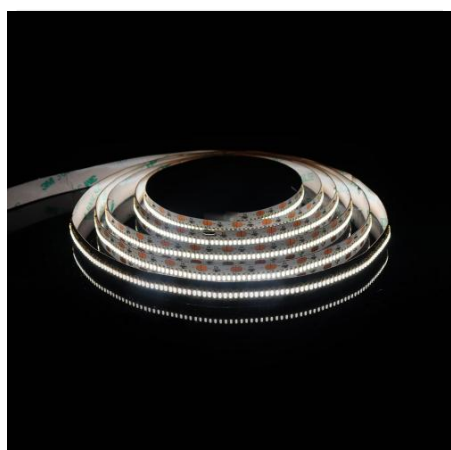

14.07.2026 - Disclaimer: information subject to change.