

LED strip | 24V | 60LED/m 3528 | 5m | IP67 |
3000K | CRI>90

ARTICLE NUMBER: 127-078

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



24V LED strip with 60 pcs 3528 SMD LEDs per metre. Based on stable technology, ideal for indirect lighting such as coves.

Key product features:

- **Number of light sources per metre:** 60
- **Lamp power per metre (W):** 4.8
- **Colour temperature (K):** 3000
- **Width (mm):** 10
- **Length of single sections (mm):** 100
- **Degree of protection (IP):** IP67
- **Luminous flux per metre (Lm):** 288



Technical specifications:

Product Name	LED strip 24V 60LED/m 3528 5m IP67 3000K CRI>90
Ean	8714984907324
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	60
Lamp power per meter	4.8W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	Yes
Length of particular segments	100mm
Degree of protection (IP)	IP67
Self-adhesive	Yes

25.08.2026 - Disclaimer: information subject to change.

Luminous flux per meter	344lm
Total length	5m
Width	10mm
Height/depth	4mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	104.85lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	24W
Beam angle adjustable	No
Luminaire efficacy	74lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	3500K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

25.08.2026 - Disclaimer: information subject to change.

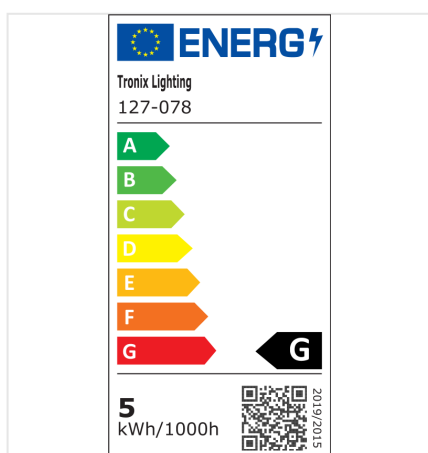

25.08.2026 - Disclaimer: information subject to change.