

LED strip CC || 120LED/m 2835 | 5m | IP20 |
2700K | CRI>90

ARTICLE NUMBER: 127-117

View this
product in
our
webshop



27.08.2026 - Disclaimer: information subject to change.

Constant current single color LED strip for indoor use. For lengths up to 15 meter with a special technology for an equal distribution of light output. With 3M adhesive tape on the back for easy installation.

Maximum 5 meters of LED strip in one single length. Looking to connect multiple lengths to one single power supply? In that case, choose separate LED strips of up to 5 meters each. For a 10-meter run, simply power the strip from both ends.

Features

- 12 LEDs = 100 mm
- IP20 for indoor use
- High color rendering index CRI>90
- Constant color temperature MacAdam: <3
- Long lifespan of 54.000 hours (L70)
- Double layer PCB for good heat dissipation

Technical specifications:

Product Name	LED strip CC 120LED/m 2835 5m IP20 2700K CRI>90
Ean	8714984927506
Outer box qty	1st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	120
Lamp power per meter	24W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V

27.08.2026 - Disclaimer: information subject to change.

With protective cover	No
Length of particular segments	50mm
Degree of protection (IP)	IP20
Self-adhesive	Yes
Luminous flux per meter	2098lm
Total length	5m
Width	10mm
Height/depth	1.2mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	639.35lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	120W
Beam angle adjustable	No
Luminaire efficacy	87.4lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	2700K
Warranty	3 years

27.08.2026 - Disclaimer: information subject to change.



Ambient temperature	-20 - 50°C
---------------------	------------

Lowest bending radius	50mm
-----------------------	------

27.08.2026 - Disclaimer: information subject to change.






CARE



SHARE



CONNECT

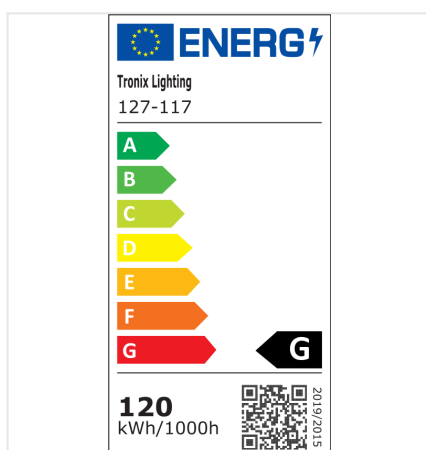

27.08.2026 - Disclaimer: information subject to change.