

LED strip | COB | 10W/m | 50m | IP20 | 4000K  
| free cuttable

ARTICLE NUMBER: 127-215

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.



This COB LED strip provides a continuous light line with no visible diodes. Freely cuttable for ultimate flexibility. Available in Colour temperatures from 2200K to 6500K, IP20 or IP65, and lengths of 5 or 50 meters.

## Key product features:

- **Beam angle (°):** 180
- **Lamp power per meter (W):** 10
- **Colour temperature (K):** 4000
- **Degree of protection (IP):** IP20
- **Luminous flux per meter (lm):** 1114
- **Total length (m):** 50


## Technical specifications:

|                           |                                                              |
|---------------------------|--------------------------------------------------------------|
| Product Name              | LED strip   COB   10W/m   50m   IP20   4000K   free cuttable |
| Ean                       | 8714984949300                                                |
| Outer box qty             | 1st                                                          |
| Model                     | Strip                                                        |
| Lamp type                 | LED not exchangeable                                         |
| Lamp voltage              | 0 - 24V                                                      |
| Number of nodes per meter | 480                                                          |
| Lamp power per meter      | 10W                                                          |
| Beam angle                | 180°                                                         |
| Voltage type              | DC                                                           |
| Type of control gear      | LED operating device voltage-controlled                      |
| Input voltage tracklights | 24V                                                          |
| With protective cover     | No                                                           |
| Degree of protection (IP) | IP20                                                         |
| Self-adhesive             | Yes                                                          |
| Luminous flux per meter   | 820lm                                                        |

24.08.2026 - Disclaimer: information subject to change.

|                                     |                              |
|-------------------------------------|------------------------------|
| Total length                        | 50m                          |
| Width                               | 8mm                          |
| Height/depth                        | 2mm                          |
| Colour of light                     | White                        |
| Suitable for dimmer                 | Yes                          |
| Colour rendering index CRI          | 90-100                       |
| Exchangeable control gear           | Yes                          |
| Connection type                     | Other                        |
| Rated lifetime L70/B50 at 25 °C     | 54000h                       |
| Colour of light adjustable          | No                           |
| Luminous flux per foot              | 338.33lm                     |
| Luminous flux adjustable            | Continuously variable        |
| LED type                            | COB                          |
| Max. system power                   | 500W                         |
| Beam angle adjustable               | No                           |
| Luminaire efficacy                  | 110lm/W                      |
| Power factor                        | 1                            |
| Type of wiring                      | Loop-through wiring included |
| Number of poles                     | 2                            |
| Connectable conductor cross section | 0.5 - 2.5mm <sup>2</sup>     |
| Colour temperature                  | 4000K                        |
| Warranty                            | 3 years                      |
| Ambient temperature                 | -20 - 50°C                   |
| Lowest bending radius               | 10mm                         |

24.08.2026 - Disclaimer: information subject to change.

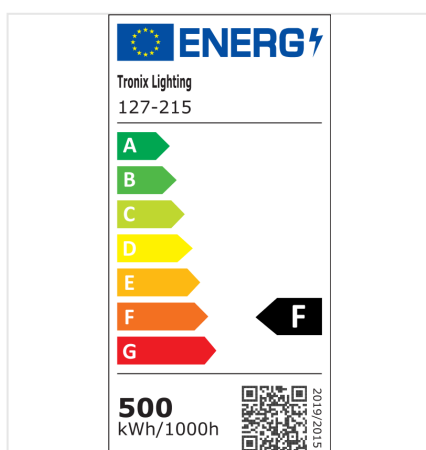

24.08.2026 - Disclaimer: information subject to change.