

Post top light | black | 20/40/60W | 2700K/3300K/4000K

ARTICLE NUMBER: 220-033

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.

Durable post-top luminaire with IP66 protection, selectable power (20/40/60 W) and colour temperature (2700K/3300K/4000K). Uniform indirect light distribution. Suitable for Ø60/76 mm poles and public outdoor spaces.

Key product features

- **Housing colour:** Black
- **Degree of protection (IP):** IP66
- **Suitable for spigot size (mm):** 60 – 76
- **Impact strength:** IK10
- **Colour temperature (K):** 2700 – 4000
- **Max. system power (W):** 60

Technical specifications:

Product Name	Post top light black 20/40/60W 2700K/3300K/4000K
Ean	8714984952065
Outer box qty	1st
Dimmable	No
Type	Post-top fixture
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Black
Housing material	Aluminium
Material cover	Plastic, transparent
Connection type	Other
Mounting method	Post top/side entry
Height/depth	320mm
Diameter	550mm
Colour of light	White

24.08.2026 - Disclaimer: information subject to change.

Colour consistency (McAdam ellipse)	SDCM3
Colour temperature	2700 - 4000K
Colour rendering index CRI	80-89
Voltage type	AC
Nominal voltage	120 - 277V
Nominal current	272 - 272mA
Suitable for lamp power	0 - 0W
Suitable for spigot size	60 - 76mm
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Reflector
Cable length	1m
With connection cable	Yes
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	Yes
With control gear	Yes
Degree of protection (IP)	IP66
Surface protection	Powder coating
Impact strength	IK10
Rated lifetime L70/B50 at 25 °C	236000h
Max. system power	60W
Rated luminous flux according to IEC 62722-2- 1	1800 - 4900lm
Luminaire efficacy	84lm/W
Power factor	0.95
Type of wiring	Ending

24.08.2026 - Disclaimer: information subject to change.





Warranty	5 years
----------	---------

Ambient temperature	-30 - 50°C
---------------------	------------

Connection cable length	5m
-------------------------	----

24.08.2026 - Disclaimer: information subject to change.

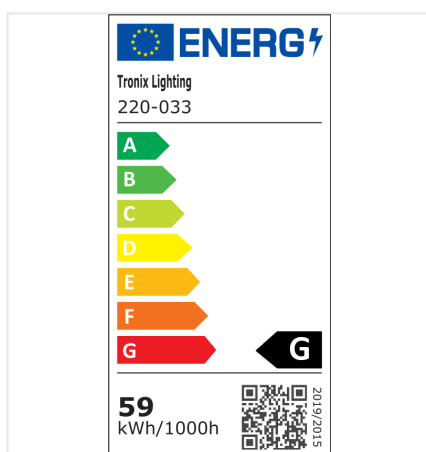

24.08.2026 - Disclaimer: information subject to change.