

# PS36 | string | 3m | black wire | 6500K CW

ARTICLE NUMBER: 018-500

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.

Pro System Modular 36V is a low voltage modular lighting system for creating safe lighting designs in public places such as neighborhood parks, shopping centers and squares.

Are you already familiar with Tronix Pro System Modular 36V? Then you are probably also aware of the endless possibilities in lighting design and applications!

### Features

- IP44
- Safe lighting designs due to the low voltage 36V
- Advanced material composition for an even longer life and greater ease of use
- Max. 50 meters in one single length. Connect more lengths to one power supply? Then work with dividers to create multiple lengths of max. 50 meters each.

### Technical specifications:



|                           |                                            |
|---------------------------|--------------------------------------------|
| Product Name              | PS36   string   3m   black wire   6500K CW |
| Ean                       | 8714984939455                              |
| Outer box qty             | 20st                                       |
| Lamp type                 | LED not exchangeable                       |
| Number of light points    | 30                                         |
| With light source         | Yes                                        |
| Connected load            | 2W                                         |
| Suitable for outdoor use  | Yes                                        |
| Voltage type              | DC                                         |
| Couplable                 | Yes                                        |
| Type of control gear      | LED operating device voltage-controlled    |
| Input voltage tracklights | 36V                                        |

24.08.2026 - Disclaimer: information subject to change.



|                                     |                              |
|-------------------------------------|------------------------------|
| Degree of protection (IP)           | IP44                         |
| Type                                | Light string                 |
| Nominal voltage                     | 36 - 36V                     |
| Colour                              | Black                        |
| Total length                        | 3m                           |
| Colour of light                     | White                        |
| Exchangeable control gear           | No                           |
| Connection type                     | Other                        |
| Rated lifetime L70/B50 at 25 °C     | 20000h                       |
| Power factor                        | 0.95                         |
| Type of wiring                      | Loop-through wiring included |
| Number of poles                     | 2                            |
| Type of power supply                | Mains power supply           |
| Connectable conductor cross section | 0.5 - 0.5mm²                 |
| Colour temperature                  | 6500K                        |
| Warranty                            | 2 years                      |

24.08.2026 - Disclaimer: information subject to change.

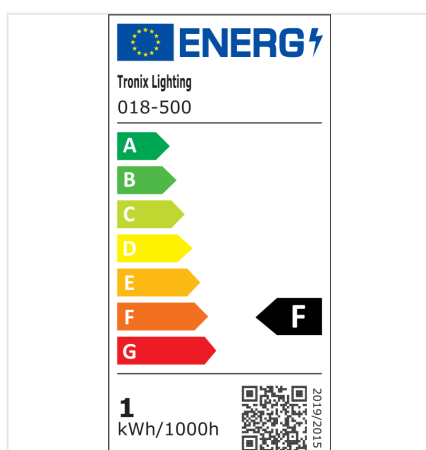

24.08.2026 - Disclaimer: information subject to change.