

Refl downl matt | Ø228mm | black | 3-CCT |
13~25W | GST18i3

ARTICLE NUMBER: 136-398

View this
product in
our
webshop



06.09.2026 - Disclaimer: information subject to change.



This downlight combines efficiency with bright illumination, featuring a matte reflector and lens. The low UGR rating prevents glare, while Colour of light adjustable and Max. system power options make this fixture ideal for a range of professional applications.

Key product features:

- **Max. system power (W):** 13 - 25
- **Colour temperature (K):** 3000 – 5700
- **Housing colour:** Black
- **Reflector:** Matt
- **Outer diameter (mm):** 228
- **Built-in diameter (mm):** 199 - 218
- **Connection type:** Plug-in connector for plug-in building installation

Technical specifications:

Product Name	Refl downl matt Ø228mm black 3-CCT 13~25W GST18i3
Ean	8714984950429
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Black
Housing material	Aluminium
Material cover	Plastic, transparent
Connection type	GST18i3
Height/depth	61mm
Outer diameter	228mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	61 - -mm
Built-in diameter	199 - 218mm




06.09.2026 - Disclaimer: information subject to change.

Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	No
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour of light adjustable	Positions
Reflector colour	Silver
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Luminous flux adjustable	Positions
Light outlet	Direct
Beam angle	41-80° - Wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	102 - 102mA
Number of poles	2
Light distributor	Reflector
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²

06.09.2026 - Disclaimer: information subject to change.

Type of control gear	LED operating device current-controlled
Exchangeable control gear	Yes
With control gear	Yes
Degree of protection (IP), front side	IP54
Degree of protection (IP), rear side	IP20
Surface protection	Lacquered
Impact strength	IK02
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	25W
Rated luminous flux according to IEC 62722-2- 1	1560 - 3000lm
Luminaire efficacy	120 - 120lm/W
Power factor	0.97
Suitable for lamp power	0 - 0W
Dimming method	Non-dimmable
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	not adjustable
Unified Glare Ratio (UGR)	19.9
Reflector	Matt
Warranty	5 years
Ambient temperature	-20 - 40°C

06.09.2026 - Disclaimer: information subject to change.

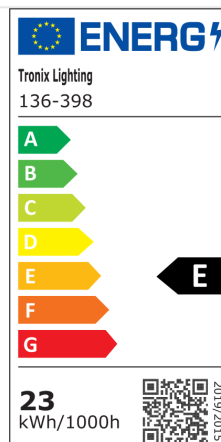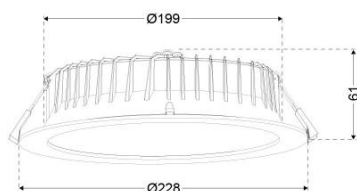

06.09.2026 - Disclaimer: information subject to change.