

Refl downl || white | Ø190mm | 4000K |  
750mA | no driver

ARTICLE NUMBER: 136-271

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.

This downlight offers aesthetics and functionality. Its wide beam angle of 60° ensures optimal light distribution. A glass in front of the reflector keeps out moisture and dust, ideal for situations requiring a robust solution.

## Key product features:

- **Max. system power (W):** 30
- **Colour temperature (K):** 4000
- **Housing colour:** White
- **Outer diameter (mm):** 190
- **Built-in diameter (mm):** 160 - 170
- **Connection type:** Other
- **Degree of protection (IP), front side:** IP44

## Technical specifications:

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| Product Name      | Refl downl    white   Ø190mm   4000K   750mA   no driver |
| Ean               | 8714984937789                                            |
| Outer box qty     | 12st                                                     |
| Lamp type         | LED not exchangeable                                     |
| Lamp holder       | None                                                     |
| Housing colour    | White                                                    |
| Housing material  | Aluminium                                                |
| Material cover    | Glass transparent                                        |
| Connection type   | Stripped wire                                            |
| Height/depth      | 75mm                                                     |
| Outer diameter    | 190mm                                                    |
| Built-in length   | - - -mm                                                  |
| Built-in width    | - - -mm                                                  |
| Built-in height   | 75 - -mm                                                 |
| Built-in diameter | 160 - 170mm                                              |



24.08.2026 - Disclaimer: information subject to change.

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| Suitable for built-in mounting       | Yes                                     |
| Suitable for surface mounting        | No                                      |
| Suitable for pedestal/floor mounting | No                                      |
| Suitable for wall mounting           | No                                      |
| Suitable for ceiling mounting        | Yes                                     |
| Suitable for light-track mounting    | No                                      |
| Suitable for clamp-mounting          | Yes                                     |
| With movement sensor                 | No                                      |
| With presence detector               | No                                      |
| With light sensor                    | No                                      |
| Colour of light                      | White                                   |
| Colour consistency (McAdam ellipse)  | SDCM3                                   |
| Colour of light adjustable           | No                                      |
| Reflector colour                     | Silver                                  |
| Colour temperature                   | 4000K                                   |
| Colour rendering index CRI           | 80-89                                   |
| Luminous flux adjustable             | No                                      |
| Light outlet                         | Direct                                  |
| Beam angle                           | 41-80° - Wide beam                      |
| Beam angle adjustable                | No                                      |
| Voltage type                         | AC                                      |
| Nominal voltage                      | - - -V                                  |
| Nominal current                      | - - -mA                                 |
| Light distributor                    | Reflector                               |
| Light distribution                   | Symmetric                               |
| Connectable conductor cross section  | 0.75 - 2.5mm²                           |
| Type of control gear                 | LED operating device current-controlled |

24.08.2026 - Disclaimer: information subject to change.

|                                                 |                |
|-------------------------------------------------|----------------|
| Exchangeable control gear                       | No             |
| With control gear                               | No             |
| Degree of protection (IP), front side           | IP44           |
| Degree of protection (IP), rear side            | IP20           |
| Surface protection                              | Powder coating |
| Impact strength                                 | IK02           |
| Rated lifetime L70/B50 at 25 °C                 | 50000h         |
| Max. system power                               | 30W            |
| Rated luminous flux according to IEC 62722-2- 1 | - - -lm        |
| Luminaire efficacy                              | - - -lm/W      |
| Power factor                                    | 1              |
| Suitable for lamp power                         | 0 - 0W         |
| Dimming method                                  | Optional       |
| Surface brushed                                 | No             |
| Emergency power supply system                   | None           |
| Emergency function monitoring system            | None           |
| Adjustability                                   | not adjustable |
| Unified Glare Ratio (UGR)                       | 16             |
| Reflector                                       | High-gloss     |
| Warranty                                        | 5 years        |
| Ambient temperature                             | -20 - 45°C     |

24.08.2026 - Disclaimer: information subject to change.

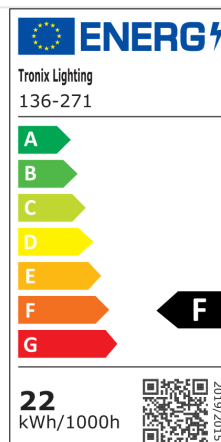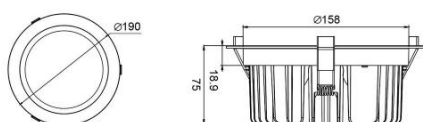

24.08.2026 - Disclaimer: information subject to change.