

# Reflector downlight eco || black | Ø145mm | 10/15W | 3-CCT

ARTICLE NUMBER: 136-196

View this  
product in  
our  
webshop



10.09.2026 - Disclaimer: information subject to change.



This reflector downlight provides glare-free lighting with a low viewing angle and UGR rating. Features a 3-CCT switch (3000K, 4000K, 6000K) and adjustable Max. system power (70%/100%). Comes with a driver and plug for fast installation.

## Key product features:

- **Max. system power (W):** 10 - 15
- **Colour temperature (K):** 3000 - 6000
- **Reflector:** High-gloss
- **Housing colour:** Black
- **Outer diameter (mm):** 145
- **Built-in diameter (mm):** 120 - 140
- **Connection type:** Plug

## Technical specifications:

|                   |                                                            |
|-------------------|------------------------------------------------------------|
| Product Name      | Reflector downlight eco    black   Ø145mm   10/15W   3-CCT |
| Ean               | 8714984938991                                              |
| Outer box qty     | 30st                                                       |
| Lamp type         | LED not exchangeable                                       |
| Lamp holder       | None                                                       |
| Housing colour    | Black                                                      |
| Housing material  | Aluminium                                                  |
| Material cover    | Plastic, transparent                                       |
| Connection type   | EU plug                                                    |
| Height/depth      | 81.8mm                                                     |
| Outer diameter    | 145mm                                                      |
| Built-in length   | - - -mm                                                    |
| Built-in width    | - - -mm                                                    |
| Built-in height   | 81.8 - -mm                                                 |
| Built-in diameter | 120 - 140mm                                                |



10.09.2026 - Disclaimer: information subject to change.

|                                      |                     |
|--------------------------------------|---------------------|
| Suitable for built-in mounting       | Yes                 |
| Suitable for surface mounting        | No                  |
| Suitable for pedestal/floor mounting | No                  |
| Suitable for wall mounting           | No                  |
| Suitable for ceiling mounting        | Yes                 |
| Suitable for light-track mounting    | No                  |
| Suitable for clamp-mounting          | Yes                 |
| With movement sensor                 | No                  |
| With presence detector               | No                  |
| With light sensor                    | No                  |
| Colour of light                      | White               |
| Colour consistency (McAdam ellipse)  | SDCM6               |
| Colour of light adjustable           | Positions           |
| Reflector colour                     | Silver              |
| Colour temperature                   | 3000 - 4000 - 5700K |
| Colour rendering index CRI           | 80-89               |
| Luminous flux adjustable             | No                  |
| Light outlet                         | Direct              |
| Beam angle                           | 41-80° - Wide beam  |
| Beam angle adjustable                | No                  |
| Voltage type                         | AC                  |
| Nominal voltage                      | 220 - 240V          |
| Nominal current                      | 60 - 60mA           |
| Number of poles                      | 2                   |
| Light distributor                    | Reflector           |
| Light distribution                   | Symmetric           |
| Connectable conductor cross section  | 0.75 - 2.5mm²       |

10.09.2026 - Disclaimer: information subject to change.

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Type of control gear                            | LED operating device current-controlled |
| Exchangeable control gear                       | No                                      |
| With control gear                               | Yes                                     |
| Degree of protection (IP), front side           | IP44                                    |
| Degree of protection (IP), rear side            | IP20                                    |
| Surface protection                              | Powder coating                          |
| Impact strength                                 | IK02                                    |
| Rated lifetime L70/B50 at 25 °C                 | 50000h                                  |
| Max. system power                               | 15W                                     |
| Rated luminous flux according to IEC 62722-2- 1 | 1000 - 1500lm                           |
| Luminaire efficacy                              | 100 - 100lm/W                           |
| Power factor                                    | 0.96                                    |
| Suitable for lamp power                         | 0 - 0W                                  |
| Dimming method                                  | Non-dimmable                            |
| Surface brushed                                 | No                                      |
| Type of wiring                                  | Ending                                  |
| Emergency power supply system                   | None                                    |
| Emergency function monitoring system            | None                                    |
| Adjustability                                   | not adjustable                          |
| Unified Glare Ratio (UGR)                       | 20.2                                    |
| Reflector                                       | High-gloss                              |
| Warranty                                        | 5 years                                 |
| Ambient temperature                             | -20 - 40°C                              |

10.09.2026 - Disclaimer: information subject to change.

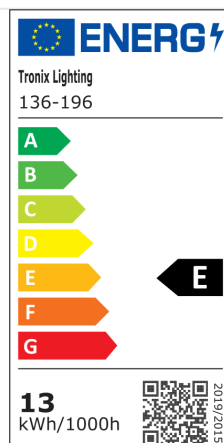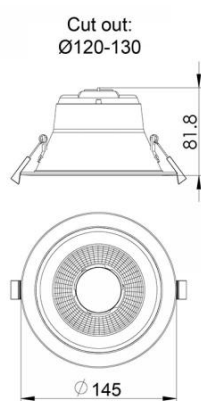

10.09.2026 - Disclaimer: information subject to change.