



CARE SHARE CONNECT



RF LED controller with 5 colour channels for RGBTW applications on 12–24 V DC. Seamless adjustment of colour, colour temperature and brightness. PWM frequency is adjustable for flicker-free performance.

Key product features

- **Type of control:** RF
- **Number of colour channels:** 5
- **Output voltage (V):** 12 – 24
- **Input voltage (V):** 12 – 24
- **Max. output current (A):** 15
- **Control type:** Constant voltage

Technical specifications:


Product Name	RF controller RGBTW 12~24V
Ean	8714984953031
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	15A
Output voltage	12 - 24V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	114mm
Width	38mm
Height	20mm
Number of zones	1
Number of colour channels	5, RGBTW

14.07.2026 - Disclaimer: information subject to change.



Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	12 - 24V
Control method	RF
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.

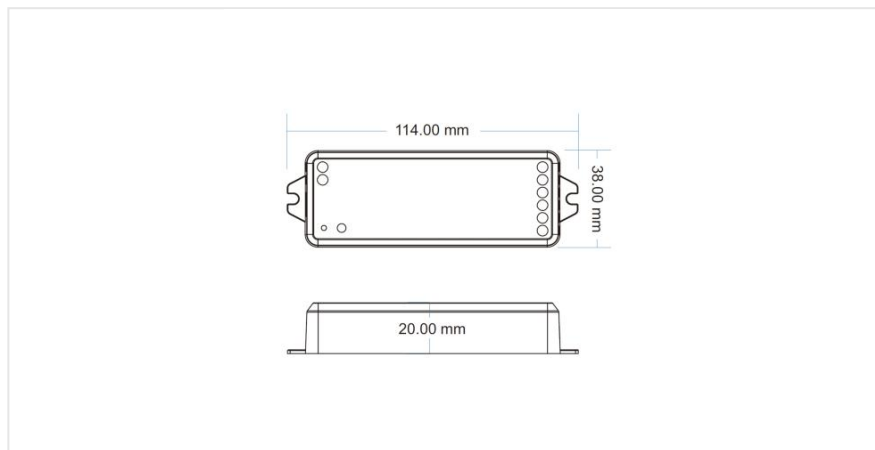

14.07.2026 - Disclaimer: information subject to change.