TRONIX guided by light

RF | controller | SC | 100-240V trailing edge | DIN

ARTICLE NUMBER: 213-027

View this product in our webshop



16.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

This AC trailing edge RF + push dimmer for DIN rail mounting provides flexible and reliable control of 230V light sources in professional installations.

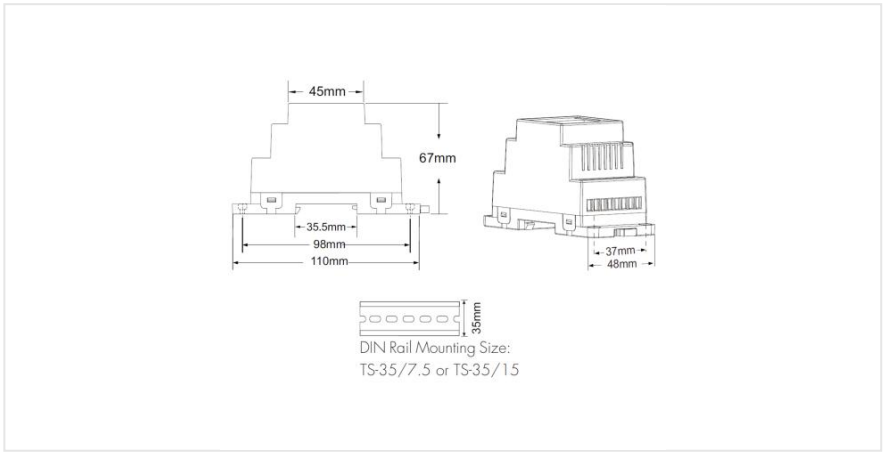
Key product features

- **Control method:** RF
- **DIN rail mounting:** Yes
- **Input voltage (V):** 100 – 240
- **Output voltage (V):** 100 – 240
- **Max. output current (A):** 2

Technical specifications:

Product Name	RF | controller | SC | 100-240V trailing edge | DIN
Ean	8714984956261
Outer box qty	1st
Colour	White
Connection type	Screwed terminal
Operating method	Radio frequency (RF)
Control method	RF
Mounting method	Built-in
Material	Plastic
Material quality	Thermoplastic
Applicable with presence indicator	Yes
Suitable for degree of protection (IP)	IP20
Applicable with movement sensor	Yes
Applicable with button	Yes
Applicable with transmission button	Yes
Applicable with time switch/timer	Yes
Nominal voltage	100 - 240V

Control voltage	100 - 240V
Min. brightness controllable	Yes
Max. switching power LED	300W
Light value memory	Yes
Halogen free	Yes
RAL-number (similar)	9016
Core cross section	0.75 - 2.5mm??
Warranty	5 years


45mm
67mm
35.5mm
98mm
110mm
37mm
48mm
35mm
DIN Rail Mounting Size:
TS-35/7.5 or TS-35/15