

RF | driver | TW | 25W | 250~700mA |
max. 54V | NFC

ARTICLE NUMBER: 214-171

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Compact, professionally configurable LED driver for tunable white applications – NFC programmable and suitable for downlights, LED panels and other constant current luminaires.

Key product features

- **Suitable for constant current:** Yes
- **Output voltage (V):** 6 – 54
- **Output current (mA):** 250 - 700
- **Output power (W):** 1.5 - 25
- **Dimming RF:** Yes
- **Dimming Touch and Dim:** Yes

Technical specifications:


Product Name	RF driver TW 25W 250~700mA max. 54V NFC
Ean	8714984925014
Outer box qty	50st
Housing	Encapsulated
Model	Static
Output voltage	6 - 54V
Output current	250 - 700mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	1.5 - 25W
Degree of protection (IP)	IP20
Length	120mm
Width	41mm
Height	28mm
Power consumption	25W

24.08.2026 - Disclaimer: information subject to change.



Input voltage	196 - 264V
Frequency input voltage	0 - 60Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	RF
Short-circuit protected	Yes
Ambient temperature	-25 - 45??C
Driver lifetime	100000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	Central (central battery)
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

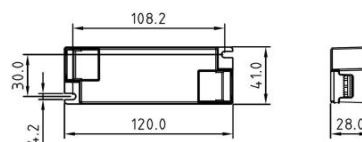

24.08.2026 - Disclaimer: information subject to change.