RF | driver | TW | 25W | 250~700mA | max. 54V | NFC

ARTICLE NUMBER: 214-171

View this product in our webshop



23.11.2026 - Disclaimer: information subject to change.

Compact, professionally configurable LED driver for tunable white applications – NFC programmable and suitable for downlights, LED panels and other constant current luminaires.

Key product features

- **Suitable for constant current:** Yes
- **Output voltage (V):** 6 – 54
- **Output current (mA):** 250 - 700
- **Output power (W):** 1.5 - 25
- **Dimming RF:** Yes
- **Dimming Touch and Dim:** Yes

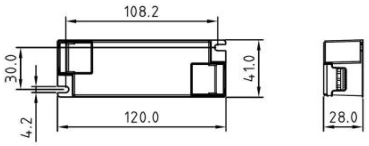
Technical specifications:

Product Name	RF | driver | TW | 25W | 250~700mA | max. 54V | NFC
Ean	8714984925014
Outer box qty	50st
Housing	Encapsulated
Model	Static
Output voltage	6 - 54V
Output current	250 - 700mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	1.5 - 25W
Degree of protection (IP)	IP20
Length	120mm
Width	41mm
Height	28mm
Power consumption	25W

23.11.2026 - Disclaimer: information subject to change.

Input voltage	196 - 264V
Frequency input voltage	0 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	RF
Short-circuit protected	Yes
Ambient temperature	-25 - 45??C
Driver lifetime	100000h
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	Central (central battery)
Control type	Constant current
Warranty	5 years


TRONIX
214-171
RF Dimmable Driver
SELV


108.2
30.0
41.0
4.2
120.0
28.0