

# RF | power supply | 24V | 75W

ARTICLE NUMBER: 213-702

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.



RF LED driver with Push-dim function for single-colour LED lighting.  
Combines wireless control with operation via a standard push button and delivers a stable 24 V output with a maximum power of 75 W.

## Key product features

- **Control method:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 24 – 24
- **Input voltage (V):** 220 – 240
- **Output current (A):** 3.125
- **Control type:** Voltage controlled

## Technical specifications:


|                                        |                               |
|----------------------------------------|-------------------------------|
| Product Name                           | RF   power supply   24V   75W |
| Ean                                    | 8714984954212                 |
| Outer box qty                          | 1st                           |
| Housing                                | Plastic housing               |
| Model                                  | Static                        |
| Output voltage                         | 0 - 24V                       |
| Output current                         | 0 - 3.125mA                   |
| Suitable for outdoor use               | No                            |
| Suitable for DC-voltage (primary side) | No                            |
| Output power                           | 0 - 75W                       |
| Degree of protection (IP)              | IP20                          |
| Length                                 | 179mm                         |
| Width                                  | 56mm                          |
| Height                                 | 30mm                          |
| Power consumption                      | 75W                           |

24.08.2026 - Disclaimer: information subject to change.



|                               |                  |
|-------------------------------|------------------|
| Input voltage                 | 220 - 240V       |
| Frequency input voltage       | 50 - 60Hz        |
| PWM modulation                | No               |
| Overload protection           | Yes              |
| Overtemperature protection    | Yes              |
| Control method                | RF               |
| Short-circuit protected       | Yes              |
| Ambient temperature           | -20 - 50??C      |
| Driver lifetime               | 50000h           |
| Number of colour channels     | 1                |
| DIN-rail mounting             | No               |
| Brand                         | Tronix Lighting  |
| Dimmable                      | Yes              |
| Emergency power supply system | None             |
| Control type                  | Constant voltage |
| Warranty                      | 5 years          |

24.08.2026 - Disclaimer: information subject to change.

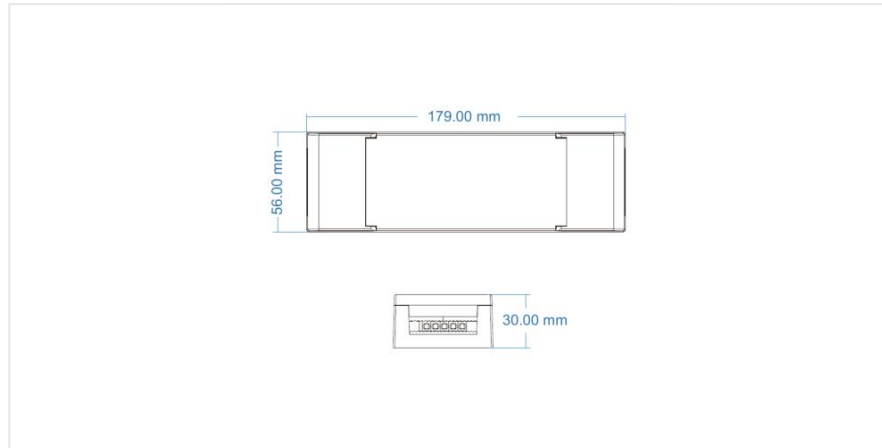

24.08.2026 - Disclaimer: information subject to change.